


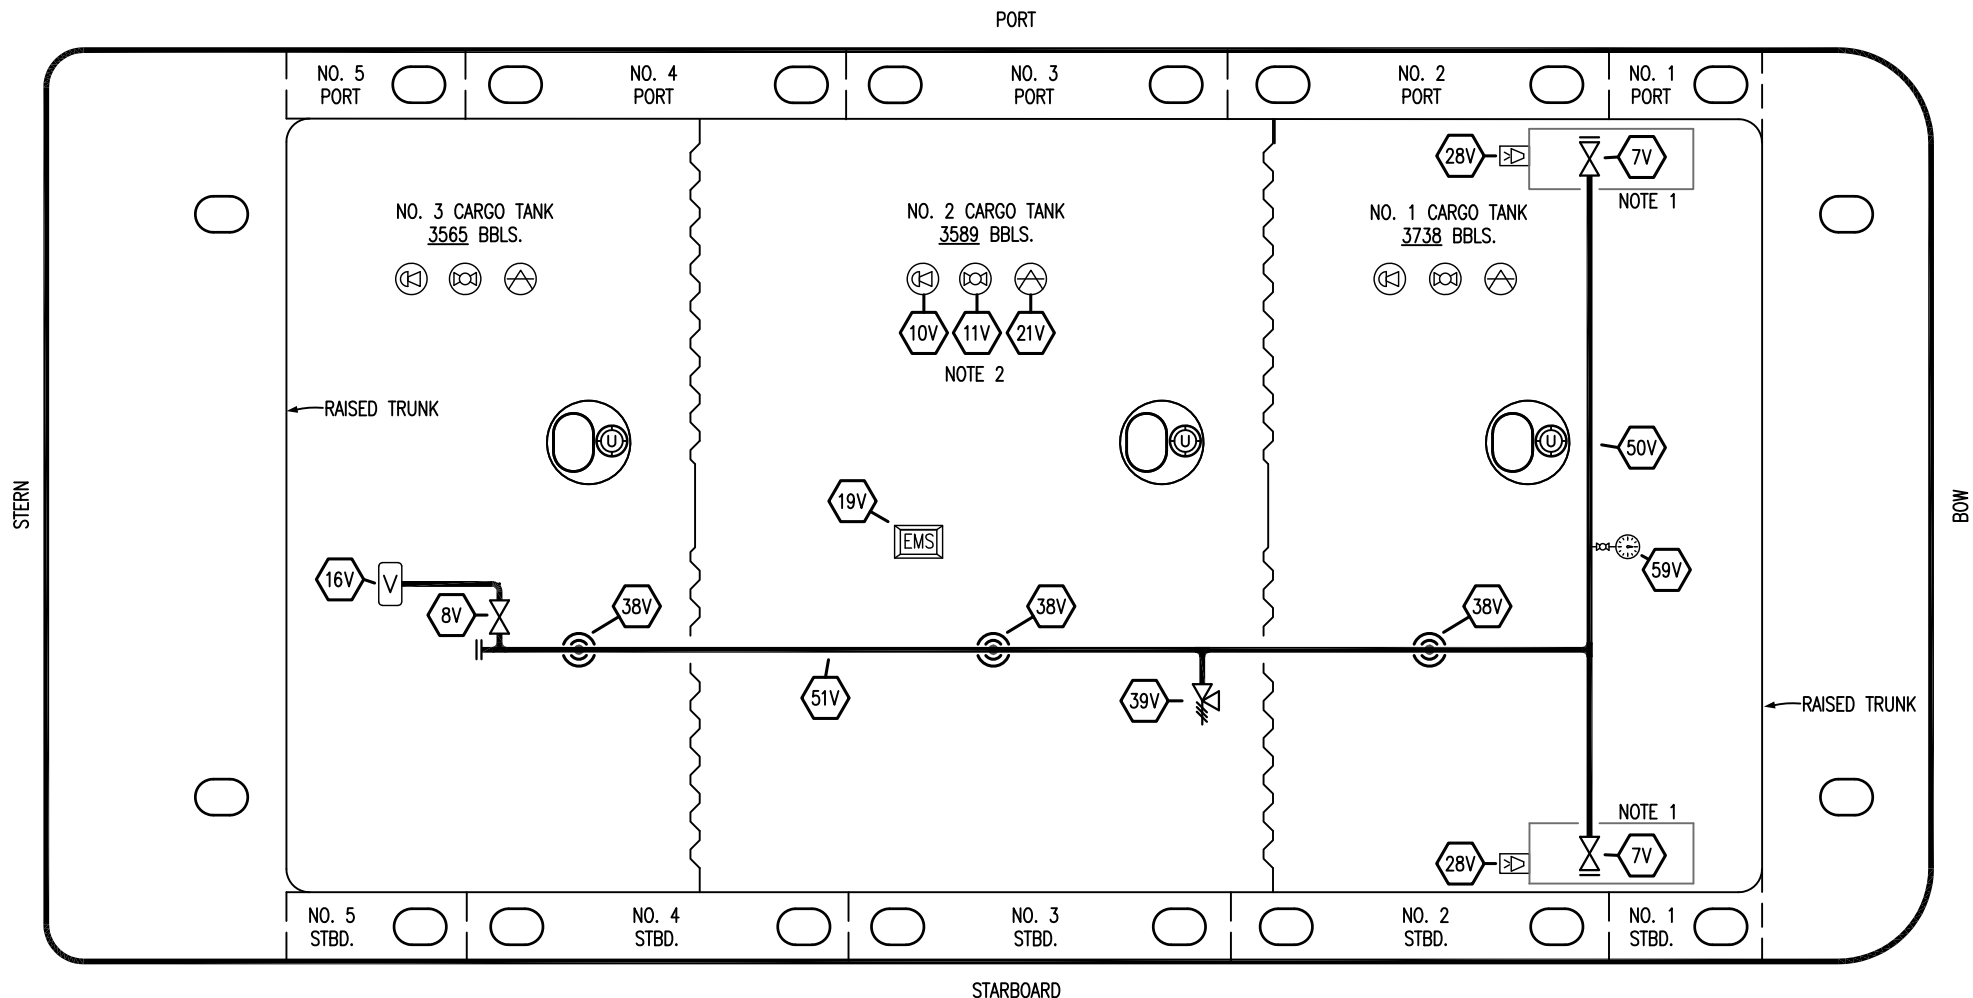

NO	DESCRIPTION	NO	DESCRIPTION
7V	HEADER VALVE	28V	DOCK CONNECTION ALARM
8V	VENT STACK VALVE	38V	VAPOR PENETRATION
10V	HIGH LEVEL/OVERFILL ALARM	39V	PRESSURE/VACUUM VALVE
11V	1-METER GAUGE STICK	50V	VAPOR HEADER
14V	SIGHT GLASS	51V	VAPOR PIPELINE
16V	VAPOR VENT STACK	59V	PRESS/VAC GAUGE
19V	EMERGENCY ENGINE SHUT DOWN	—	ABOVE DECK PIPING
21V	HERMETIC GAUGE		

NOTE 2: TYPICAL RIGGING IN EACH TANK

NOTE 1: CONTAINMENT P/S

						KIRBY INLAND MARINE			
						VAPOR			
						PIPING FLOW DIAGRAM			
0	08/19/24	AC	DDA	JF	ISSUED FOR APPROVAL	SCALE: NONE		HFL 232SS	
REV.	DATE	BY	CHK	APP	REVISION DESCRIPTION	PAGE: 2 OF 3		REV. 0	