



**United States of America
Department of Homeland Security
United States Coast Guard**

Certification Date: 02 Jun 2022
Expiration Date: 02 Jun 2023

Temporary Certificate of Inspection

For ships on international voyages this certificate fulfills the requirements of SOLAS 74 as amended, regulation V/14, for a SAFE MANNING DOCUMENT.

This Temporary Certificate of Inspection is issued under the provision of Title 46 United States Code, Section 399, in lieu of the regular certificate of inspection, and shall be in force only until the receipt on board said vessel of the original certificate of inspection, this certificate in no case to be valid after one year from the date of inspection.

Vessel Name	Official Number	IMO Number	Call Sign	Service
KIRBY 14801	994280			Tank Barge

Hailing Port	Hull Material	Horsepower	Propulsion
HOUSTON, TX	Steel		
UNITED STATES			

Place Built	Delivery Date	Keel Laid Date	Gross Tons	Net Tons	DWT	Length
AVONDALE, LA	31Dec1967		R-1126	R-1126		R-214.5
			I-	I-		I-0

Owner	Operator
KIRBY INLAND MARINE LP 55 WAUGH DR STE 1000 HOUSTON, TX 77007 UNITED STATES	KIRBY INLAND MARINE, LP 18350 MARKET STREET CHANNELVIEW, TX 77530 UNITED STATES

This vessel must be manned with the following licensed and unlicensed Personnel. Included in which there must be 0 Certified Lifeboatmen, 0 Certified Tankermen, 0 HSC Type Rating, and 0 GMDSS Operators.

0 Masters	0 Licensed Mates	0 Chief Engineers	0 Oilers
0 Chief Mates	0 First Class Pilots	0 First Assistant Engineers	
0 Second Mates	0 Radio Officers	0 Second Assistant Engineers	
0 Third Mates	0 Able Seamen	0 Third Assistant Engineers	
0 Master First Class Pilot	0 Ordinary Seamen	0 Licensed Engineers	
0 Mate First Class Pilots	0 Deckhands	0 Qualified Member Engineer	

In addition, this vessel may carry 0 Passengers, 0 Other Persons in crew, 0 Persons in addition to crew, and no Others. Total Persons allowed: 0

Route Permitted And Conditions Of Operation:
---Lakes, Bays, and Sounds---

Also, in fair weather only, coastwise, not more than twelve (12) miles from shore between St. Marks and Carrabelle, Florida.

This vessel has been granted a fresh water service examination interval in accordance with 46 CFR 31.10-21(a) (2). If this vessel is operated in salt water more than 6 months in any 12 month period, the vessel must be inspected using salt water intervals per 46 CFR 31.10-21(a) (1) and the cognizant OCMI must be notified in writing as soon as this change in status occurs.

*****SEE NEXT PAGE FOR ADDITIONAL CERTIFICATE INFORMATION*****

With this Inspection for Certification having been completed at Houston/Galveston, TX, UNITED STATES, the Officer in Charge, Marine Inspection, Sector Houston-Galveston certified the vessel, in all respects, is in conformity with the applicable vessel inspection laws and the rules and regulations prescribed thereunder.

Annual/Periodic/Re-Inspection				This certificate issued by Joseph W. Morgans CDR, USCG, By Direction Officer in Charge, Marine Inspection Sector Houston-Galveston Inspection Zone
Date	Zone	A/P/R	Signature	



Temporary Certificate of Inspection

Vessel Name: KIRBY 14801

This tank barge is participating in the Eighth and Ninth Coast Guard District's Tank Barge Streamlined Inspection Program (TBSIP). Inspection activities aboard this barge shall be conducted in accordance with its Tank Barge Action Plan (TAP). Inspection issues concerning this barge should be directed to OCMI Houston-Galveston.

---Hull Exams---

Exam Type	Next Exam	Last Exam	Prior Exam
DryDock	02May2032	02May2022	11Sep2014
Internal Structure	28Feb2027	18Feb2022	17Dec2019

--- Liquid/Gas/Solid Cargo Authority/Conditions ---

Authorization: PROPYLENE OXIDE (POX)

Total Capacity	Units	Highest Grade Type	Part151 Regulated	Part153 Regulated	Part154 Regulated
14380	Barrels	A	Yes	No	No

Hazardous Bulk Solids Authority

Loading Constraints - Structural

Tank Number	Max Cargo Weight per Tank (short tons)	Maximum Density (lbs/gal)
1&2(POX)	836	6.91

Loading Constraints - Stability

Hull Type	Maximum Load (short tons)	Maximum Draft (ft/in)	Max Density (lbs/gal)	Route Description
II	1673	8ft 7in	6.91	LBS, R

Conditions Of Carriage

Only those cargoes named in the vessel's Cargo Authority Attachment(CAA: C1-2201385) dated (27 APR 22) may be carried, and then only in the tanks indicated. When the vessel is carrying cargoes containing greater than 0.5% benzene, the person in charge is responsible for ensuring the provisions of 46 US Code of Federal Regulations Part 197, Subpart C are applied.

Per 46 CFR 150.130, the Person In Charge of the vessel is responsible for ensuring that the compatibility requirements of 46 CFR 150 are met. Cargoes must be checked for compatibility using the figures, tables, and appendices of 46 CFR 150 in conjunction with the reactive group numbers from the "Compat Group No" column listed in the vessel's Cargo Authority Attachment.

The maximum design density of cargo which may be filled to the tank top is 6.91 lbs/gal. Cargoes with higher densities, up to 6.91 lbs/gal, may be carried as slack loads, but shall not exceed the tank weight limits as listed below.

Stability & Trim

Per 46 CFR 151.10-15(c)(2) the max. tank weights listed above reflect uniform (within 5%) loading at the deepest draft allowed. When carrying Subchapter O cargoes at shallower drafts, the barge(s) should always be loaded uniformly.

--- Inspection Status ---

Cargo Tanks

Tank Id	Internal Exam			External Exam		
	Previous	Last	Next	Previous	Last	Next
1&2(POX)	11Sep2014	02May2022	02May2032	02Jan2020	18Feb2022	28Feb2025



Temporary Certificate of Inspection

Vessel Name: KIRBY 14801

Tank Id	Safety Valves	Hydro Test		
		Previous	Last	Next
1&2(POX)	24Feb2022	-	-	-

---Conditional Portable Fire Extinguisher Requirements---

Required Only During Transfer of Cargo or Operation of Barge Machinery

--- Fire Fighting Equipment ---

Fire Extinguishers - Hand portable and semi-portable

Quantity	Class Type
1	B-II

END



Certificate of Inspection

Cargo Authority Attachment

Official #: 994280

Shipyard: AVONDALE

Hull #: 1143

46 CFR 151 Tank Group Characteristics

Tank Group Information		Cargo Identification				Tanks				Cargo Transfer		Environmental Control		Fire Protection Provided	Special Requirements			
Tnk Grp	Tanks in Group	Density	Press.	Temp.	Hull Typ	Cargo Seg Tank	Type	Vent	Gauge	Pipe Class	Cont	Tanks	Handling Space		General	Materials of Construction	Elec Haz	Temp Cont
A	#1 P/S	6.91	Press.	Amb.	II		Ind. Pressure	SR	Closed	II	P-1	Inert	NA	Portable	.50-10, .50-13, .50-73,		NR	No

- Notes:
- Under Environmental Control, Tanks, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo tanks.
 - Under Environmental Control, Handling Space, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo handling space. NA means that the vessel does not have a cargo control space, and this requirement is not applied.
 - Under Electrical Hazard Class, NA means that the tank group is suitable only for those cargoes which have no electrical hazard class requirement. NR means that the vessel has no electrical equipment located in a hazardous location.

List of Authorized Cargoes

Cargo Identification										Conditions of Carriage				
Name	Chem Code	Compat Group No	Sub Chapter	Grade	Hull Type	Tank Group	Vapor Recovery		Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Period				
							App'd (Y or N)	VCS Category						
Propylene oxide	POX	16	O	A	II	A	Yes	7	.50-10, 50-13	G				

Authorized Subchapter O Cargoes

Propylene oxide	POX	16	O	A	II	A	Yes	7	.50-10, 50-13	G
-----------------	-----	----	---	---	----	---	-----	---	---------------	---



Certificate of Inspection

Cargo Authority Attachment

Shipyard: AVONDALE

Official #: 994280

Page 2 of 2

Hull #: 1143

Explanation of terms & symbols used in the Table:

Cargo Identification

Name	The proper shipping name as listed in 46 CFR Table 30.25-1, 46 CFR Table 151.05, and 46 CFR Part 153 Table 2.
Chem Code none	The three letter designation assigned to the cargo in the Chemical Hazards Response Information System (CHRIS) Manual. Certain mixtures of cargoes may not have a CHRIS Code assigned.
Compatibility Group No.	The cargo reactive group number assigned for compatibility determinations in 46 CFR Part 150 Tables I and II. In accordance with 46 CFR 150.130, the Person-in-Charge of the barge is responsible for ensuring that the compatibility requirements of 46 CFR Part 150 are met. Cargoes must be checked for compatibility using the figures, tables, and appendices of 46 CFR 150 in conjunction with the assigned reactive group number.
Note 1	Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Chart. For additional compatibility information, contact Commandant (CG-ENG-5), 2703 Martin Luther King Jr. Ave SE Stop 7509, Washington DC 20593-7509. Email: hazmatstandards@uscg.mil.
Note 2	See Appendix I to 46 CFR Part 150 - exceptions to the compatibility chart.
Subchapter	The subchapter in Title 46 Code of Federal Regulations under which the cargo has been classified.
Subchapter D	Those flammable and combustible liquids listed in 46 CFR Table 30.25-1.
Subchapter O	Those hazardous cargoes listed in 46 CFR Table 151.05 and 46 CFR Part 153 Table 2.
Note 3	Those cargoes listed in 46 CFR Part 153 Table 2 are non-regulated cargoes when carried in bulk on non-oceangoing barges.
Grade	The cargo classification assigned to each flammable or combustible liquid. Grades inside of "()" indicate a provisional assignment based upon literature sources which were not verified by manufacturers data. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo.
A, B, C	Flammable liquid cargoes, as defined in 46 CFR 30-10.22.
D, E	Combustible liquid cargoes, as defined in 46 CFR 30-10.15.
Note 4	The flammability/combustibility grade of these cargoes may vary depending upon the flashpoint and Reid vapor pressure. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo.
NA	Those subchapter O cargoes which are not classified as a flammable or combustible liquid.
#	No flammability/combustibility grade has been assigned yet, as the necessary flash point/vapor pressure data for such assignments are presently not available.
Hull Type	The required barge hull classification for carriage of the specified Subchapter O hazardous material cargo, see 46 CFR 151.10-1.
I	Designed to carry products which require the maximum preventive measures to preclude the uncontrolled release of the cargo. See 46 CFR 151.10-1(b)(1).
II	Designed to carry products which require significant preventive measures to preclude the uncontrolled release of cargo. See 46 CFR 151.10-1(b)(3).
III	Designed to carry products of sufficient hazard to require a moderate degree of control. See 46 CFR 151.10-1(b)(4).
NA	Not applicable to barges certificated under Subchapter D.

Conditions of Carriage

Tank Group	The vessel's tank group (as defined in Section 4) which is authorized for carriage of the named cargo.
Vapor Recovery Approved (Y or N)	Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo. No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

Conditions of Carriage

Tank Group	The vessel's tank group (as defined under the "46 CFR Tank Group Characteristics" listed on page 1) which is authorized for carriage of the named cargo.
Vapor Recovery Approved (Y or N)	Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo. No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.
VCS Category:	The specified cargo's provisional classification for vapor control systems.
Category 1	(No additional VCS requirements above those for benzene, gasolines and crude oil) All requirements applying to the handling of oil and hazardous materials in Titles 33 and 46 Code of Federal Regulations (CFR) apply to these cargoes. Those specifically dealing with vapor control systems are in 33 CFR 155.750, 33 CFR 156.120, 33 CFR 156.170, 46 CFR 35.35 and 46 CFR 39. The cargo tank venting system calculations (46 CFR 39.2011) and the pressure drop calculations (46 CFR 39.3001) must use appropriate friction factors, vapor densities and vapor growth rates.
Category 2	(Polymerizes) Polymerization and residue build-up of these cargoes can adversely affect the vessel by fouling safety components and restricting vapor flow which could lead to cargo tank overpressurization. The vessel's owner must develop a method of ensuring all VCS safety components are functional and polymer build-up is not causing an unsafe condition due to increased pressure in the vapor control piping and cargo tanks. The method shall be acceptable to the local Officer in Charge, Marine Inspection. This is in addition to the requirements of Category 1. Please note that a material not normally considered a monomer can be a problem in detonation arrester.
Category 3	(Highly toxic) VCSs for these toxic cargoes cannot use a spill valve or rupture disk as the primary means to meet the overfill protection requirement of 46 CFR 39.2009. This requirement is in addition to the requirements of Category 1.
Category 4	(Polymerizes and highly toxic) Must comply with requirements of Categories 1, 2 and 3.
Category 5	(High vapor pressure) VCS pressure drop calculations for cargoes with a vapor pressure greater than 14.7 psia at 115 F must take into account increased vapor-air mixture densities and vapor growth rates as compared to Category 1 cargoes. Consult the Marine Safety Center's VCS Guidelines for further information. This requirement is in addition to the requirements of Category 1.
Category 6	(High vapor pressure and highly toxic) Must comply with requirements of Categories 1, 3 and 5.
Category 7	(High vapor pressure and polymerizes) Must comply with requirements of Categories 1, 2 and 5.
none	The cargo has not been evaluated/classified for use in vapor control systems.

Safety valve inspection report

Certificate nr 1983
Date 04-27-2022

Job no. LV-9512-SO
Client Kirby Inland Marine
Barge # Kirby 14801

Set pressure (cold) 150 psi
Manufacturer Hydroseal
Type / Model 4FRV30E/D0
Serial No. 849420-5

Valve data

Size 1/2xRx1
Rating
Nozzle / Orifice R

Set pressure test

Found set pressure 151 psi
Reseat pressure (indication) 92 psi
Result Passed
Test method Air


Test data

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 137 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

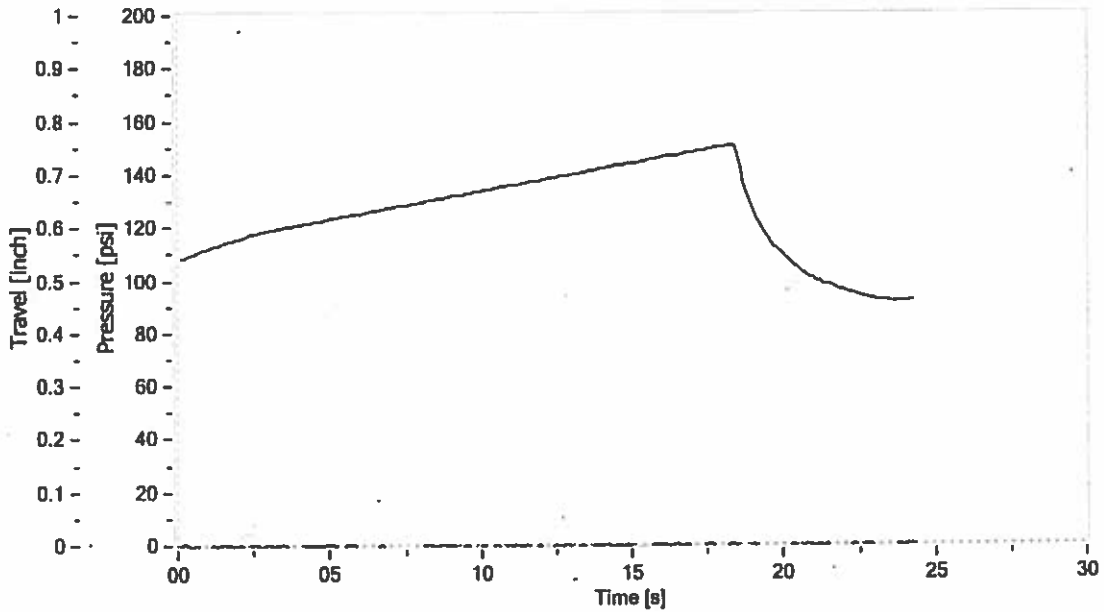

INTERLINK



Tested by

Name Javier Gutierrez

Date 4-27-22

Signature *Javier Gutierrez*

Inspected by

Name Hope Borders

Date 4-27-2022

Signature *Hope Borders*

Safety valve inspection report

Certificate nr 1999
Date 04-28-2022

Job no. LV-9512-SO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Set pressure (cold) 125 psi
Manufacturer ERL INC
Type / Model 4X6-300
Serial No. 00108

Valve data

Size 4X6
Rating 300X150
Nozzle / Orifice 3.625"

Set pressure test

Found set pressure 126 psi
Reseat pressure (indication) 123 psi
Result Passed
Test method AIR

Test data


Seat tightness test

Leakage 0 bubbles/min.
Test pressure 114 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

SCANNED

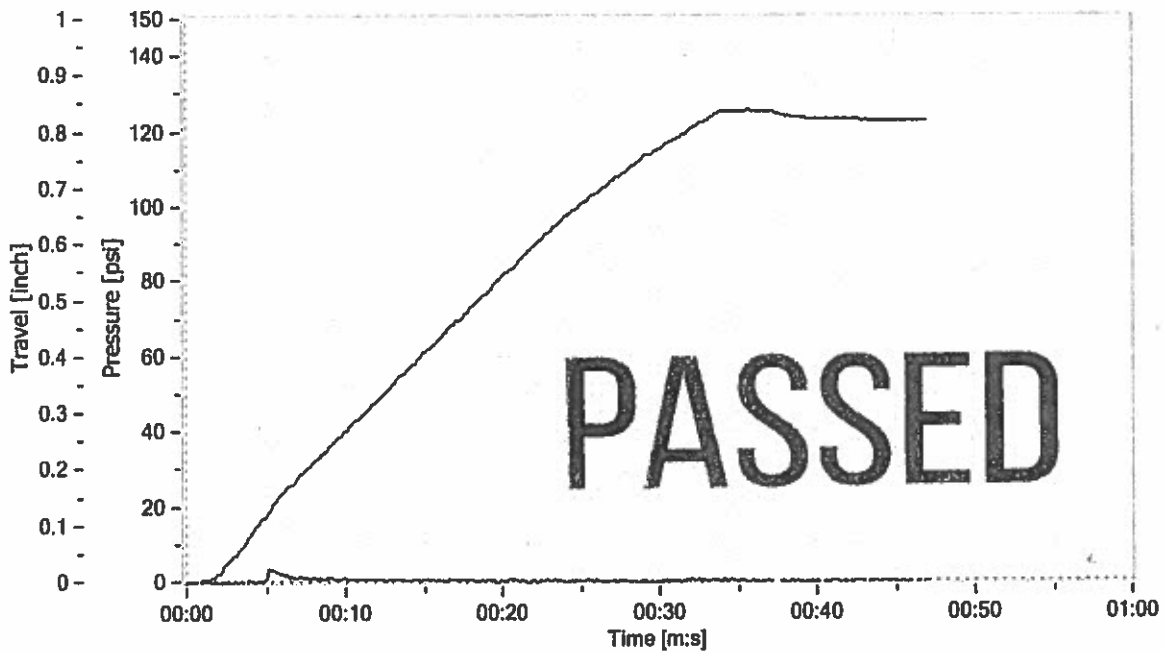

INTERLINK



Tested by

Name EDUARDO PEREZ

Date 4-28-22

Signature *[Handwritten Signature]*

Inspected by

Name ROCHA PEREZ

Date 4-28-22

Signature *[Handwritten Signature]*

Safety valve inspection report

Certificate nr 1967
Date 04-22-2022

Job no. LV-9512-SO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Set pressure (cold) 125 psi
Manufacturer ERL INC
Type / Model 4X6-300
Serial No. 00101

Valve data

Size 4X6
Rating 300x150
Nozzle / Orifice 3.625"

Set pressure test

Found set pressure 125 psi
Reseat pressure (indication) 115 psi
Result Passed
Test method AIR


Test data

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 113 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

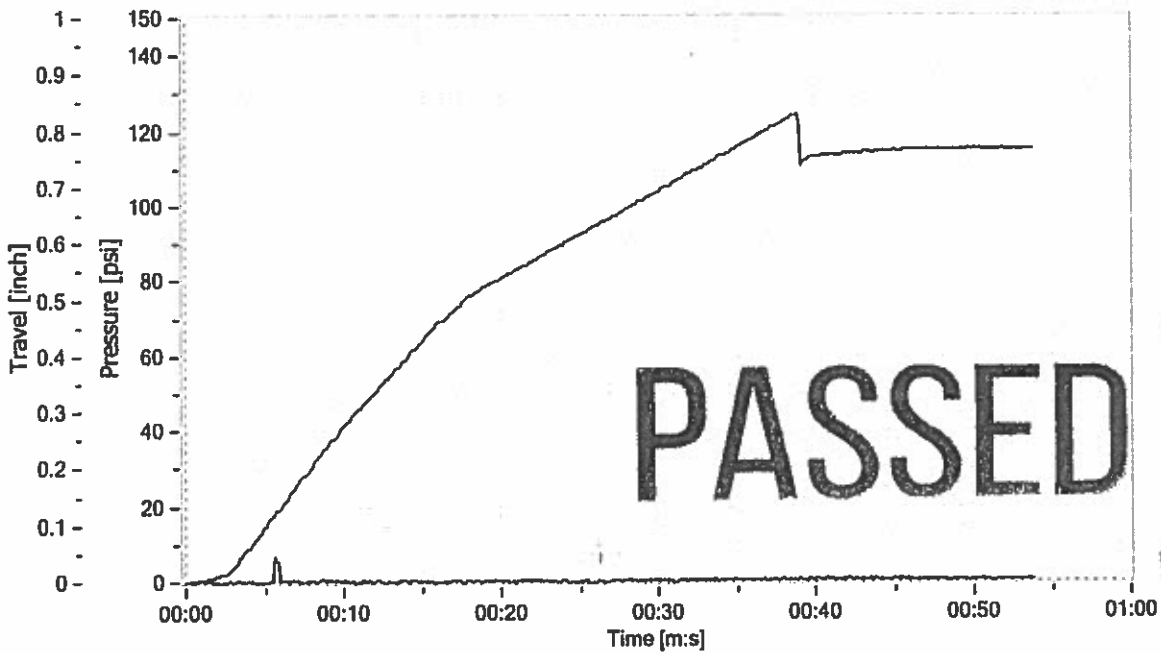

Tested by
Name EDUARDO PEREZ
Date 4/22/22
Signature *[Signature]*

Inspected by
Name Rocha Penz
Date 4/22/22
Signature *[Signature]*

Safety valve inspection report

Certificate nr 1779
Date 02-24-2022

Job no. LV-9411-WO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Valve data

Set pressure (cold) 90 psi
Manufacturer CONSOLIDATED
Type / Model 1905Q
Serial No. SC23199

Size 6XQX8
Rating 150X150
Nozzle / Orifice Q

Test data

Set pressure test


Found set pressure 90 psi
Reseat pressure (indication) 88 psi
Result Passed
Test method AIR

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 82 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

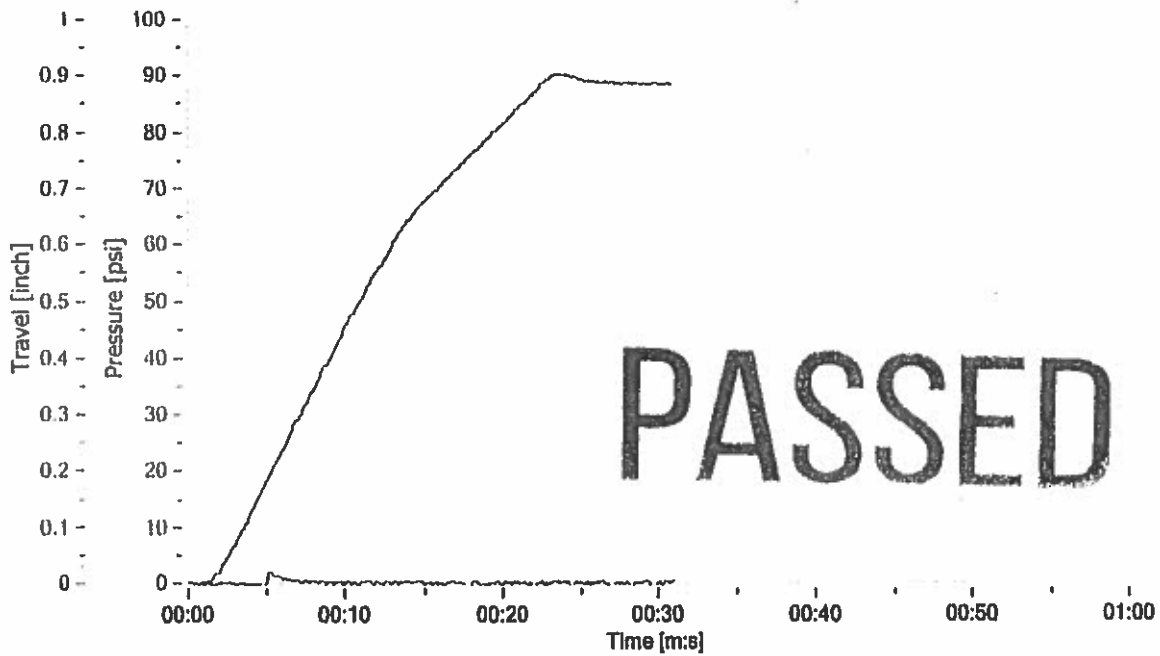

INTERLINK



Tested by
Name EDUARDO PEREZ
Date 2-24-22
Signature *[Signature]*

Inspected by
Name J. V. MENON
Date 2/24/22
Signature *[Signature]*

Safety valve inspection report

Certificate nr 1776
Date 02-23-2022

Job no. LV-10088-WO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Set pressure (cold) 90 psi
Manufacturer FARRIS
Type / Model 26RA10L-120
Serial No. 78792-A10

Valve data

Size 6RX8
Rating 150X150
Nozzle / Orifice R

Set pressure test

Found set pressure 90 psi
Reseat pressure (Indication) 89 psi
Result Passed
Test method AIR


Test data

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 81 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

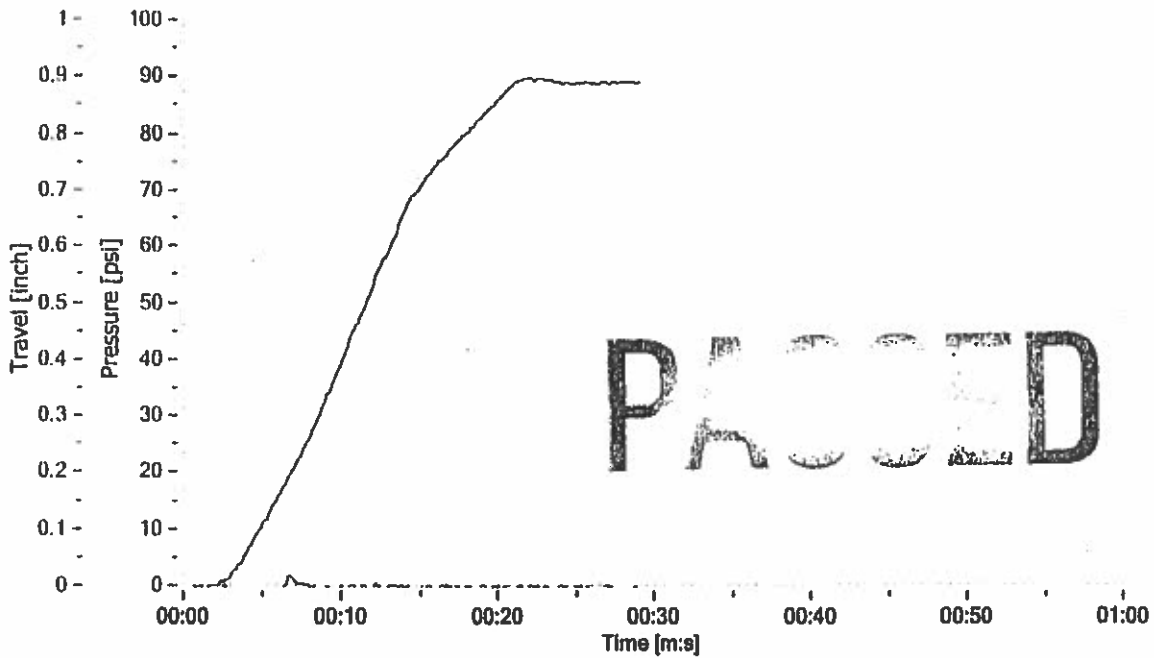

INTERLINK



Tested by

Name EDUARDO PEREZ

Date 2-23-22

Signature

Inspected by

Name J V HENDERSON

Date 27 FEB 22

Signature

Safety valve inspection report

Certificate nr 1778
Date 02-24-2022

Job no. LV-9411-WO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Set pressure (cold) 90 psi
Manufacturer CONSOLIDATED
Type / Model 1905Q
Serial No. SC23206

Valve data

Size 6XQX8
Rating 150X150
Nozzle / Orifice Q

Set pressure test

Found set pressure 90 psi
Reseat pressure (Indication) 89 psi
Result Passed
Test method AIR


Test data

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 82 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

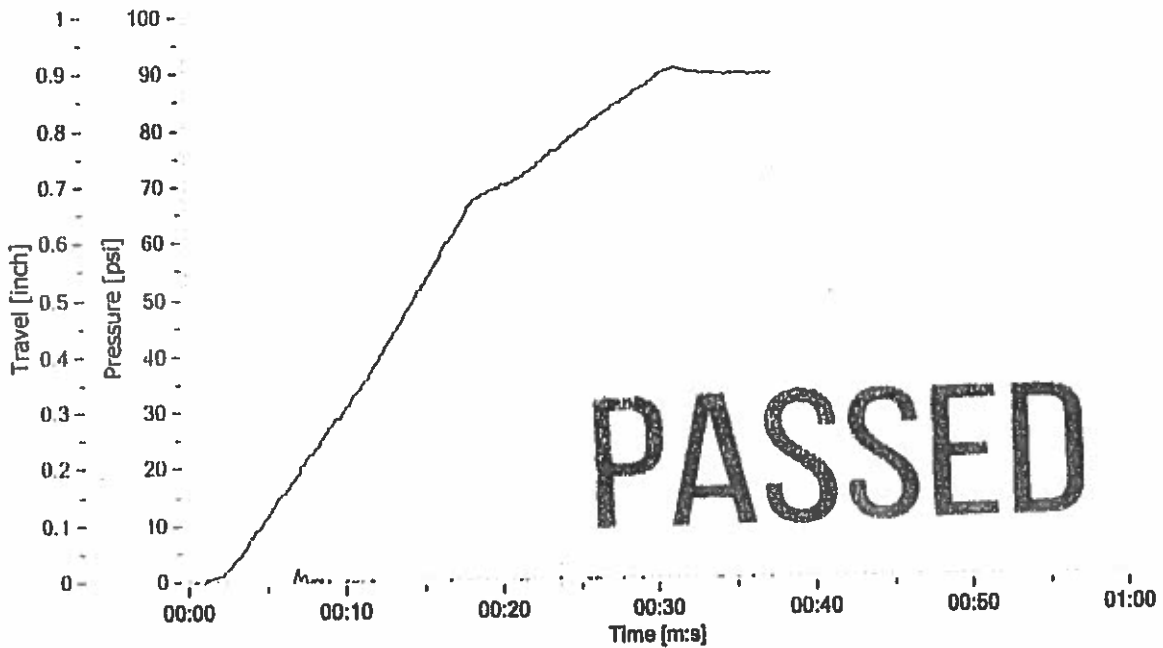

INTERLINK



Tested by
Name EDUARDO PEREZ
Date 2024-02
Signature *[Signature]*

Inspected by
Name J. MENDOZA
Date 24 FEB 2024
Signature *[Signature]*

Safety valve inspection report

Certificate nr 1777
Date 02-24-2022

Job no. LV-9411-WO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Set pressure (cold) 90 psi
Manufacturer CONSOLIDATED
Type / Model 1905Q
Serial No. SC23200

Valve data

Size 6XQX8
Rating 150X150
Nozzle / Orifice Q

Set pressure test

Found set pressure 91 psi
Reseat pressure (Indication) 90 psi
Result Passed
Test method AIR


Test data

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 82 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

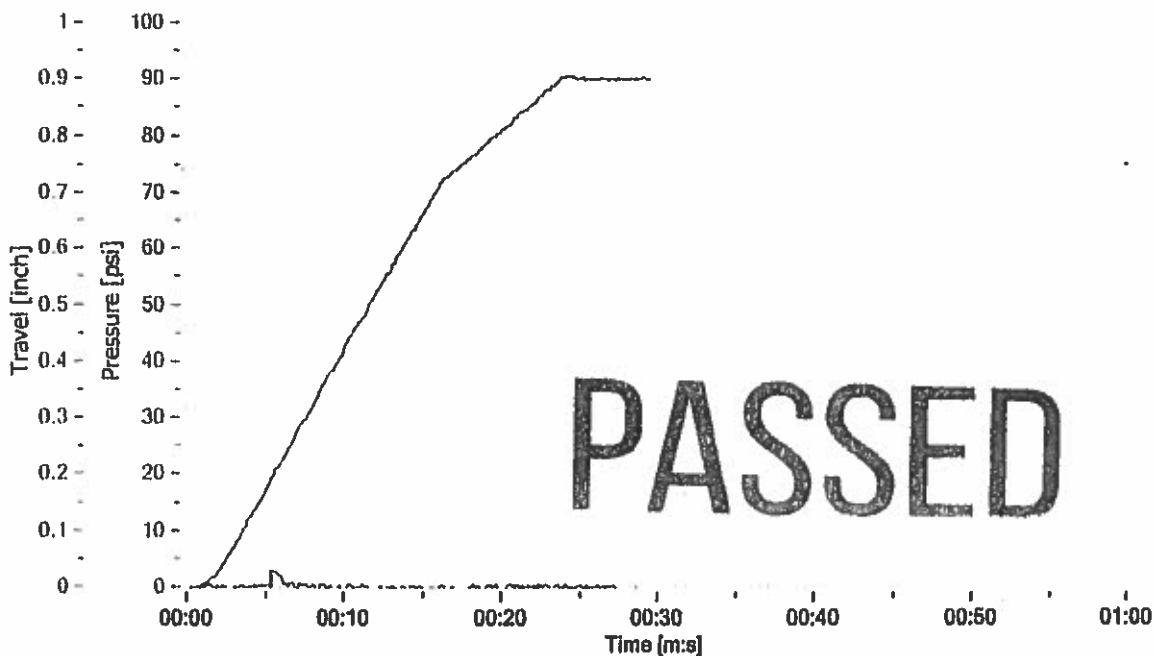

INTERLINK



Tested by
Name EDUARDO PEREZ
Date 2/24/22
Signature *[Signature]*

Inspected by
Name JV MENDOZA
Date 24 FEB 22
Signature *[Signature]*

Safety valve inspection report

Certificate nr 1773
Date 02-23-2022

Job no. LV-9411-WO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Set pressure (cold) 90 psi
Manufacturer CONSOLIDATED
Type / Model 1905Q
Serial No. SC23195

Valve data

Size 6XQX8
Rating 150X150
Nozzle / Orifice Q

Set pressure test

Found set pressure 90 psi
Reseat pressure (indication) 90 psi
Result Passed
Test method AIR


Test data

Seat tightness test


Leakage 0 bubbles/min.
Test pressure 82 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

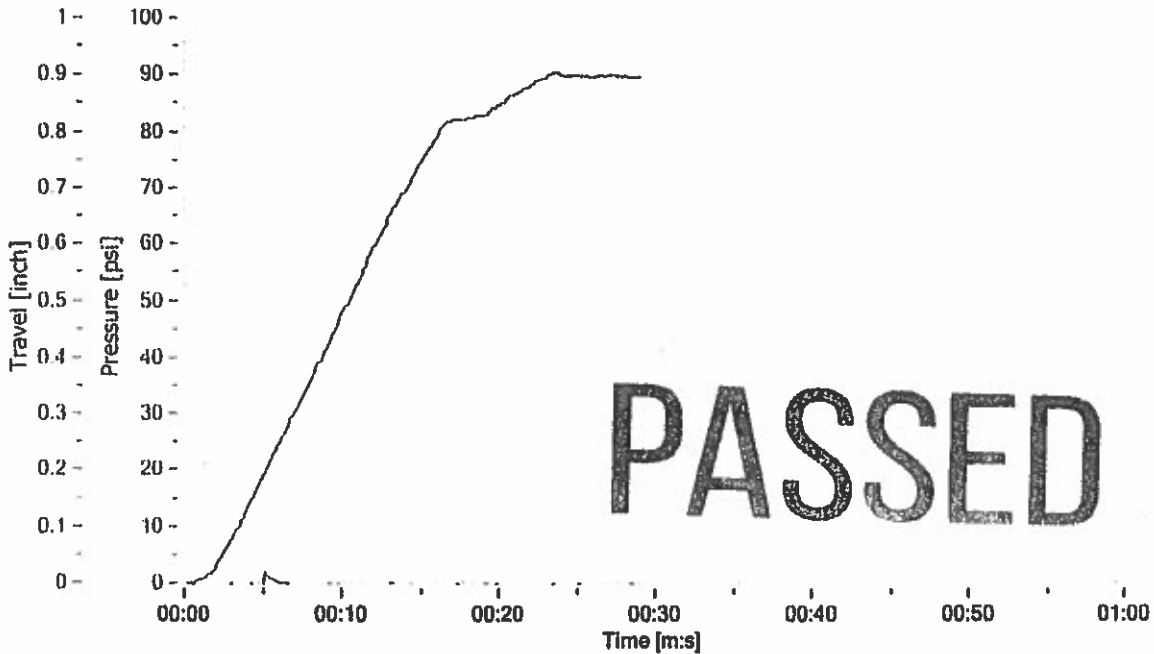

INTERLINK



Tested by
Name EDUARDO PEREZ
Date 2-23-22
Signature *[Signature]*

Inspected by
Name *[Signature]*
Date 24 FEB 22
Signature *[Signature]*

Safety valve inspection report

Certificate nr 1774
Date 02-23-2022

Job no. LV-10088-WO
Client KIRBY INLAND MARINE
Barge # KIRBY-14801

Set pressure (cold) 90 psi
Manufacturer FARRIS
Type / Model 26RA10L-120
Serial No. 78793-A10

Valve data

Size 6RX8
Rating 150X150
Nozzle / Orifice R

Set pressure test

Found set pressure 92 psi
Reseat pressure (Indication) 90 psi
Result Passed
Test method AIR


Test data

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 82 psi
Result Passed

Backpressure test

Pressure 31 psi
Result Passed

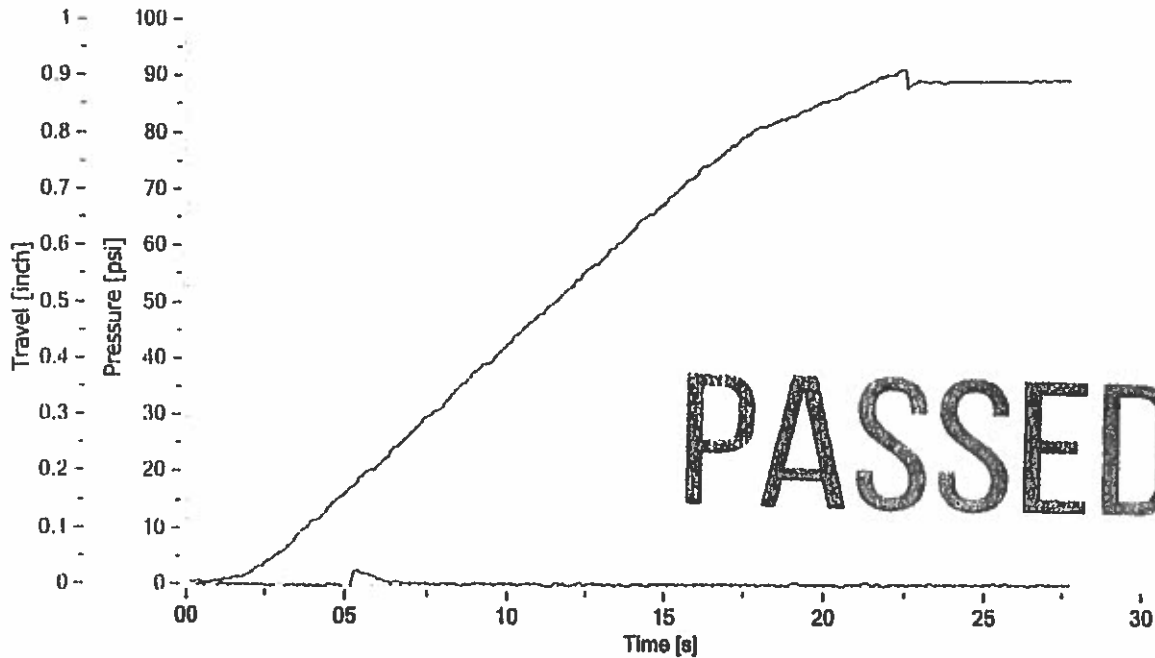

INTERLINK



Tested by

Name EDUARDO PEREZ

Date 2-23-22

Signature *Eduardo Perez*

Inspected by

Name J.V. Mendonca

Date 2/23/22

Signature *J.V. Mendonca*