

United States of America Department of Homeland Security **United States Coast Guard**

Certification Date: 19 Aug 2019 **Expiration Date:** 19 Aug 2020

Temporary Certificate of Inspection

For ships on international voyages this certificate fulfills the requirements of SOLAS 74 as amended, regulation V/14, for a SAFE MANNING DOCUMENT.

This Temporary Certificate of Inspection is issued under the provision of Title 46 United States Code, Section 399, in lieu of the regular certificate of inspection, and shall be in force only until the receipt on board said vessel of the original certificate of inspection, this certificate in no case to be valid after one year from the date of inspection

Service Official Number Vessel Name Tank Barge 1148571 **KIRBY 30718B** Hailing Port Horsepower Propulsion Hull Material WILMINGTON, DE Steel UNITED STATES DWT Place Built Net Tons Delivery Date Keel Laid Date Gross Tons R-300 0 ASHLAND CITY, TN R-1632 R-1632 30Mar2004 23Jan2004 1-0 UNITED STATES Operator Owner KIRBY INLAND MARINE, LP KIRBY INLAND MARINE, LP 16402 1/2 De Zavala Rd 55 WAUGH DRIVE SUITE 1000 Channelview, TX 77530 HOUSTON, TX 77007 UNITED STATES UNITED STATES This vessel must be manned with the following licensed and unlicensed Personnel. Included in which there must be 0 Certified Lifeboatmen, 0 Certified Tankermen, 0 HSC Type Rating, and 0 GMDSS Operators. 0 Licensed Mates 0 Chief Engineers 0 Masters

0 Chief Mates

0 First Class Pilots

O First Assistant Engineers

0 Second Mates

O Radio Officers

0 Second Assistant Engineers

0 Third Mates

0 Able Seamen

0 Third Assistant Engineers

0 Master First Class Pilot

0 Ordinary Seamen

0 Licensed Engineers

0 Mate First Class Pilots

0 Deckhands

0 Qualified Member Engineer

In addition, this vessel may carry 0 Passengers, 0 Other Persons in crew, 0 Persons in addition to crew, and no Others. Total Persons allowed: 0

Route Permitted And Conditions Of Operation:

--- Lakes, Bays, and Sounds---

Also, in fair weather only, not more than twelve (12) miles from shore between St. Marks and Carrabelle, Florida.

This vessel has been granted a fresh water service examination interval in accordance with 46 CFR 31.10-21(a). If this vessel is operated in salt water more than 6 months in any 12 month period, the vessel must be inspected using salt water intervals per 46 CFR 31.10-21(a)(1) and the cognizant OCMI must be notified in writing as soon as this change in status occurs.

This tank barge is participating in the Eighth & Ninth Coast Guard District's Tank Barge Streamlined Inspection

SEE NEXT PAGE FOR ADDITIONAL CERTIFICATE INFORMATION

With this Inspection for Certification having been completed at Port Arthur, TX, UNITED STATES, the Officer in Charge, Marine Inspection, Marine Safety Unit Port Arthur certified the vessel, in all respects, is in conformity with the applicable vessel inspection laws and the rules and regulations prescribed thereunder.

Date	Zone	A/P/R	Signature

This certificate issued by -CDR J.J. ANDREW, CDR, USCG, By direction

Officer in Charge, Marine Inspection

Marine Safety Unit Port Arthur

Inspection Zone



United States of America Department of Homeland Security United States Coast Guard

Certification Date: 19 Aug 2019 Expiration Date: 19 Aug 2020

Temporary Certificate of Inspection

Vessel Name: KIRBY 30718B

Program (TBSIP) pilot program. Inspection activities aboard this barge shall be conducted in accordance with its Tank Barge Action Plan (TAP). Inspection issues concerning this barge should be directed to OCMI Houston-Galveston.

Thermal fluid heater may only be operated when carrying grade "E" cargoes.

---Hull Exams---

 Exam Type
 Next Exam
 Last Exam
 Prior Exam

 DryDock
 31Jul2024
 03Jul2014
 29Mar2004

 Internal Structure
 31Jul2024
 19Aug2019
 03Jul2014

--- Liquid/Gas/Solid Cargo Authority/Conditions ---

Authorization: Grade "A" and lower and specified hazardous cargoes.

Total Capacity Units Highest Grade Type Part151 Regulated Part153 Regulated Part154 Regulated

30580 Barrels A Yes No No

Hazardous Bulk Solids Authority

Loading Constraints - Structural

Tank Number		Max Cargo Weight per Tank (short tons)	Maximum Density (lbs/gal)
			8.9
1S		817	8.9
1P		817	W.
2S	9	817	8.9
2P		817	8.9
3S		817	8.9
3P		817	8.9

Conditions Of Carriage

Only those specified hazardous cargoes named in the vessel's Cargo Authority Attachment (CAA), serial # C1-0306936, dated 21NOV03, may be carried. The specified hazardous cargoes may be carried only in the tanks indicated.

Per 46 CFR 150.130, the person in charge of the vessel is responsible for ensuring the compatibility requirements of 46 CFR 150 are met. Cargoes must be checked for compatibility using figures, tables, and appendices of 46 CFR 150 in conjunction with the reactive group number from the "Compat Group No" column is listed in the vessel's CAA.

Vessel not authorized to carry Benzene or Benzene containing cargoes with a Benzene concentration of 0.5% of more.

Thermal fluid heater may only be operated when carrying grade "E" cargoes.

Stability and Trim

Per 46 CFR 151.10-15(c)(2) the maximum tank weights listed above reflect uniform(within 5%) loading at the deepest draft allowed. When carrying subchapter "O" cargoes at shallower drafts, the barge should always be loaded uniformly.

The maximum design density of cargo which may be filled to the tank top is 8.7 lbs/gal. Cargoes with higher densities, up to 8.91 lbs/gal, may be carried as slack loads, but shall not exceed the tank weight limits as listed above

--- Inspection Status ---



United States of America **Department of Homeland Security United States Coast Guard**

19 Aug 2019 Certification Date: 19 Aug 2020 **Expiration Date:**

Temporary Certificate of Inspection

Vessel Name: KIRBY 30718B

Cargo Tanks						
	Internal Exam	lii ·		External Exan	n	
Tank Id	Previous	Last	Next	Previous	Last	Next
1S	29Mar2004	03Jul2014	31Jul2024	=	=0	-
1P	29Mar2004	03Jul2014	31Jul2024	<u>#</u>	2 0	-
28	29Mar2004	03Jul2014	31Jul2024	~	: - :	=
2P	29Mar2004	03Jul2014	31Jul2024	(-)		=
38	29Mar2004	03Jul2014	31Jul2024	-	•	-
3P	29Mar2004	03Jul2014	31Jul2024	*	THE	-
-3			Hydro Test			
Tank Id	Safety Valve	s	Previous	Last	Next	
1S	E		=0 ::	19Mar2004	¥:	
1P	2			19Mar2004	-	
28	= 0			19Mar2004	=:	
2P	-			19Mar2004		
3S			-	19Mar2004	-	
3P	- 1			19Mar2004	-	
.000						

--- Conditional Portable Fire Extinguisher Requirements---

Required Only During Transfer of Cargo or Operation of Barge Machinery

--- Fire Fighting Equipment ---

Fire Extinguishers - Hand portable and semi-portable

Quantity

Class Type

3

B-II

END



Serial #: C1-0306936 Generated: 21-Nov-03

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 30718B Official #: 1148571 Shipyard: Trinity Ashland City

Hull #: 4459

Tank Group Information	Cargo I	dentification	on		Cargo	ľ	Tanks		Carg Trans		Environ Control		Fire	Special Require	ements		
Trill Grg Tanks in Group	Density	Press.	Temp.	Hull Typ	Seg Tank	Туре	Vent	Gauge	Pipe Class	Cont	Tanks	Handling Space	Protection Provided	General	Materials of Construction	Elec Haz	Temp Cont
A 1-3P/S	8.91	Atmos.	Amb.	11	1ii 2ii	Integral Gravity	PV	Restr.	II	G-1	NR	NA	Portable	.50-81(a), .50- 81(b), .50-86,	55-1(h), 56-1(a), (c), (d), (e), (f), (g),	NR	No

Notes: 1. Under Environmental Control. Tanks, NR means that the tank droup is suitable only for those cardoes which require no environmental control in the cardo tanks.

List of Authorized Cargoes

Cargo Identification							Co	nditio	ns of Carriage
							Vapor R		
Name	Chem Code	Compat Group No	Sub Chapter	Grade	Hull Type	Tank Group	App'd (Y or N)	VCS Category	Special Requirements in 46 CFR 151 General and Mat'ls of Construction
Authorized Subchapter O Cargoes									<u> </u>
Acetonitrile	ATN	37	0	С	111	Α	No	N/A	No
Adiponitrile	ADN	37	0	Е	11	Α	No	N/A	No
Alkyl(C7-C9) nitrates	AKN	34 ²	0	NA	111	Α	No	N/A	.50-81, .50-86
Butyi acrylate (all isomers)	BAR	14	0	D	111	Α	No	N/A	.50-70(a), .50-81(a), (b)
Butyl methacrylate	BMH	14	0	Đ	111	Α	No	N/A	.50-70(a), .50-81(a), (b)
Butyraldehyde (all isomers)	8AE	19	0	Ç	111	Α	No	N/A	.55-1(h)
Camphor oil (light)	CPO	18	Q	D	II	Α	No	N/A	No
Chemical Oil (refined, containing phenolics)	COD	21	0	Е	- 11	Α	No	N/A	.50-73
Coal tar naphtha solvent	NCT	33	0	D	111	Α	No	N/A	.50-73
Creosote	CCV	/ 21 ²	0	Е	111	Α	No	N/A	No
Cresols (all isomers)	CRS	21	0	E	Ш	Α	No	N/A	No
Crotonaldehyde	CTA	19 ²	0	С	11	Α	No	N/A	.55-1(h)
Crude hydrocarbon feedstock (containing Butyraldehydes and	СНС	;	0		111	А	No	N/A	No
Ethylpropyl acrolein)									
Ethyl acrylate	—EAC	14	Q	—C—		A	No	N/A-	.50-70(a)50-81(a).(b)
Ethylene cyanohydrin	ETC	20	0	E	111	Α	No	N/A	No
Ethylene glycol hexyl ether	EGH	40	0	E	Ш	Α	No	N/A	No
Ethylene glycol monoalkyl ethers	EGC	40	0	D/E	111	Α	No	N/A	No
Ethylene glycol propyl ether	EGP	40	0	E	111	Α	No	N/A	No
2-Ethylhexyl acrylate	EAI	14	0	Е	111	Α	No	N/A	.50-70(a), .50-81(a), (b)
Ethyl methacrylate	ETM	14	0	D/E	111	Α	No	N/A	.50-70(a)
2-Ethyl-3-propylacrolein	EPA	19 ²	0	Е	111	Α	No	N/A	No
Hydrocarbon 5-9	HEN		0		111	Α.	No	N/A	.50-70(a), .50-81(a), (b)
Isoprene	IPR	30	Q	Α	[]]	Α	No	N/A	.50-70(a), .50-81(a), (b)
Mesityl oxide	MSO	18 ²	0	D	[]]	Α	Nο	N/A	No
Methyl acrylate	MAM	14	0	С	111	Α	No	N/A	.50-70(a), .50-81(a), (b)
Methylcyclopentadiene dimer	MCK	30	0	C	III	Α	No	N/A	No
Methyl methacrylate	MMM	14	O.	С	III	Α	No	N/A	.50-70(a), .50-81(a), (b)
alpha-Methylstyrene	MSR	30	0	D	III	Α	No	N/A	.50-70(a), .50-81(a), (b)
1- or 2-Nitropropane	NPM	42	0	D	111	Α	Nο	N/A	.50-81
1,3-Pentadiene	PDE	30	0	Α	III	Α	No	N/A	.50-70(a), .50-81
Styrene (crude)	STX		0	D	III	A	No	N/A	No
Styrene monomer	STY	30	. Q.	D	_ III_	Α	. No	N/A	.50-70(a), .50-81(a), (b)
Tetrahydrofuran	THF	41	0	С	111	Α	No	N/A	.50-70(b)
Trisodium phosphate solution	TSP	5	0	NA	Ш	Α	No	N/A	.50-73, .56-1(a), (c).

^{2.} Under Environmental Control, Handling Space, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo handling space. NA means that the vessel does not have a cargo control space, and this requirement is not applied.

^{3.} Under Electrical Hazard Class, NA means that the tank group is suitable only for those cargoes which have no electrical hazard class requirement. NR means that the vessel has no electrical equipment located in a hazardous location.



Serial #: C1-0306936 Generated: 21-Nov-03

Certificate of Inspection Cargo Authority Attachment

Vessel Name: KIRBY 30718B

Official #: 1148571

Page 2 of 3

Shipyard: Trinity Ashland City

Hull #: 4459

Cargo Identification						Co	nditio	ns of Carriage	
				I		Vapor Recovery			
Name	Chem Code	Compat Group No	Sub Chapter	Grade	Hull Type	Tank Group	App'd (Y or N)		Special Requirements in 46 CFR 15 General and Mat'is of Construction
Vinyl acetate	VAM	13	0	С	III	А	No	N/A	.50-70(a), .50-81(a), (b)
Vinyl neodecanate	VND	13	0	E	111	Α	No	N/A	.50-70(a), .50-81(a), (b)



Department of Homeland Security United States Coast Guard

Serial #: C1-0306936

21-Nov-03

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 30718B

Official #: 1148571

Page 3 of 3

Shipyard: Trinity Ashland

Hull #: 4459

Explanation of terms & symbols used in the Table:

Cargo Identificatio

Chem Code

The proper shipping name as listed in 46 CFR Table 30.25-1, 46 CFR Table 151.05, and 46 CFR Part 153 Table 2. The three letter designation assigned to the cargo in the Chemical Hazards Response Information System (CHRIS) Manual, Certain mixtures of cargoes may not have a CHRIS Code assigned.

Compatability Group No.

The cargo reactive group number assigned for compatibility determinations in 46 CFR Part 150 Tables I and II. In accordance with 46 CFR 150.130, the Person-in-Charge of the barge is responsible for ensuring that the compatibility requirements of 46 CFR Part 150 are met. Cargoes must be checked for compatibility using the figures, tables, and appendices of 46 CFR 150 in conjunction with the assigned reactive group number.

Note 1

Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Chart. For additional compatibility information, contact Commandant (G-MSO-3), U.S. Coast Guard, 2100 Second Street, SW, Washington, DC 20593-0001. Telephone (202) 267-1217. See Appendix I to 46 CFR Part 150 - exceptions to the compatability chart.

Note 2

Subchapter The subchapter in Title 46 Code of Federal Regulations under which the cargo has been classified.

Subchapter D Subchapter O Those flammable and combustible liquids listed in 46 CFR Table 30.25-1. Those hazardous cargoes listed in 46 CFR Table 151.05 and 46 CFR Part 153 Table 2.

Note 3

Those cargoes listed in 46 CFR Part 153 Table 2 are non-regulated cargoes when carried in bulk on non-oceangoing barges.

Grade

The cargo classification assigned to each flammable or combustible liquid. Grades inside of "(")" indicate a provisional assignment based upon literature sources which were not verified by manufacturers data. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo.

A.B.C

Flammable liquid cargoes, as defined in 46 CFR 30-10.22 Combustible liquid cargoes, as defined in 46 CFR 30-10.15.

The flammability/combustibility grade of these cargoes may vary depending upon the flashpoint and Reid vapor pressure. The Person-in-Charge shall verify the

cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo. Those subchapter O cargoes which are not classified as a flammable or combustible liquid.

Note 4

NΑ

No flammability/combustibility grade has been assigned yet as the necessary flash point/vapor pressure data for such assignments are presently not available.

Hull Type

The required barge hull classification for carriage of the specified Subchapter O hazardous material cargo, see 46 CFR 151.10-1.

Designed to carry products which require the maximum preventive measures to preclude the uncontrolled release of the cargo. See 46 CFR 151.10-1(b)(1). Designed to carry products which require significant preventive measures to preclude the uncontrolled release of cargo. See 46 CFR 151.10-1(b)(3).

NA

Designed to carry products of sufficeint hazard to require a moderate degree of control. See 46 CFR 151.10-1(b)(4). Not applicable to barges certificated under Subchapter D.

Conditions of Carriag

Tank Group

Vapor Recover Approved (Y or N) The vessel's tank group (as defined in Section 4) which is authorized for carriage of the named cargo.

Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo. No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

Conditions of Carriag

Tank Group

The vessel's tank group (as defined under the "46 CFR Tank Group Characteristics" listed on page 1) which is authorized for carriage of the named cargo.

Vapor Recoven Approved (Y or N)

Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo. No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

VCS Category:

The specified cargo's provisional classification for vapor control systems.

Category 1

(No additional VCS requirements above those for benzene, gasolines and crude oil) All requirements applying to the handling of oil and hazardous materials in Tilles 33 and 46 Code of Federal Regulations (CFR) apply to these cargoes. Those specifically dealing with vapor control systems are in 33 CFR 155.750, 33 CFR 156.120, 33 CFR 156.170, 46 CFR 35.35 and 46 CFR 39. The cargo tank venting system calculations (46 CFR 39.20-11) and the pressure drop calculations (46 CFR 39.30-1(b)) must use appropriate friction factors, vapor densities and vapor growth rates.

Category 2

(Polymerizes) Polymerization and residue build-up of these cargoes can adversely affect the vessel by fouling safety componenets and restricting vapor flow which could lead to cargo tank overpressurization. The vessel's owner must develop a method of ensuring all VCS safety components are functional and polymer build-up is not causing an unsafe condition due to increased pressure in the vapor control piping and cargo tanks. The method shall be acceptable to the local Officer in Charge, Marine Inspection. This is in addition to the

Category 3

requirements of Category 1. Please note that a material not normally considered a monomer can be a problem in detonation arrester. (Highly toxic) VCSs for these toxic cargoes cannot use a spill valve or rupture disk as the primary means to meet the overfill protection requirement of 46 CFR 39.20-9. This requirement is in addition to the requirements of Category 1.

Category 4

(Polymerizes and highly toxic) Must comply with requirements of Categories 1, 2 and 3.

Category 5

(High vapor pressure) VCS pressure drop calculations for cargoes with a vapor pressure greater than 14.7 psia at 115 F must take into account increased vapor-air mixture densifies and vapor growth rates as compared to Category 1cargoes. Consult the Marine Safety Center's VCS Guidelines for further information. This requirement is in addition to the requirements of Category 1.

Category 7

(High vapor pressure and highly toxic) Must comply with requirements of Categories 1, 3 and 5. (High vapor pressure and polymerizes) Must comply with requirements of Categories 1, 2 and 5.

The cargo has not been evaluated/classified for use in vapor control systems.

Law Value of Texas

16917 Market St, Channelview, TX 77530 (713)453-0413

LVT Sales Order	LV-4006-SO	_
Barge Name	K 30718B	
Work Order #	LV-4011-WO	_

Shop Order & Test Report

/lake	Morrison	Size	2.5"	Model #	153B	
lake	INIOINISON.			The Alexander Section of America	7	
erial#	LV4011-1 thru 6	Inlet	2.5 FNPT	Outlet	NA	
Constrution:	P/V			Cap:	N/A	
et Pressure:	1.0 psi pressure/1.5 OZ	vac	_			
			Orifice:	N/A		
Tag:	俊		Office.			
V4014-002-00-00-00-00-00-00-00-00-00-00-00-00	Complete	e Overhaul		Test A	ir	
Work Require	d: Complete	Overnaur			_	
Condition Rec	Neived: Nee	ed Repair				
Condition Rec	ceived.					
	Condition Pre-rep	air				
General (Jonate Circumstance		Spring	Good Cond.		
	Dirty		971119			
Inlet	Dirty	<u></u> ;	Work	ST		
Inlet Seats	Dirty			-	Installed g	gaskets
Inlet		_	Work		Installed g	gaskets

Final Test Report

Date 8/6/19	
Set Pressure 1.0 psi pressure/1.5 OZ vac	
Nozzle Ring Setting N/A	_
Back Pressure N/A	
Tested By: Course A Ruy	Witness/Assy By
U.S. Coast Guard Witness	

Safety valve inspection report

Certificate nr Date

354

08-05-2019

Job no.

LV-4006-SO

Client

Valve data

Set pressure (cold)

125 psi

Tag. No.

Serial No.

Manufacturer

Type / Model

620767-10-A14

Farris

26QA10L-120

Size

6xQx8 150x150

Rating

Nozzle / Orifice

Q Air

Fluid Barge #

K30718B

Test data

Set pressure test

Found set pressure

Reseat pressure (indication)

Result

Test method

124 psi

119 psi Passed

Air

Seat tightness test

Leakage

0 bubbles/min.

Test pressure

Result

117 psi Passed

Manual Back Pressure test


BP Pressure

30 psi

BP Result

Passed

Law Valve of 1

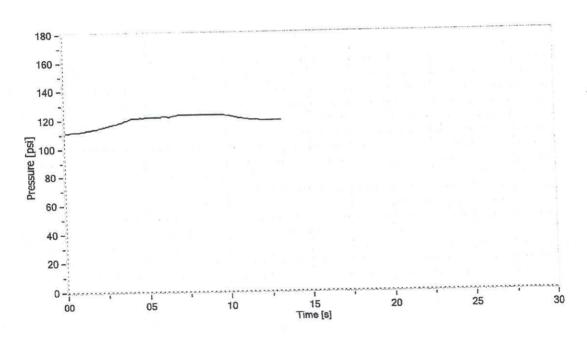

Tested by

Name Date

Signature

Javier Gutierrez

Inspected by

Name

Date

Signature

Law Valve of Texas

16917 Market St, Channelview, TX 77530 (713)453-0413

LVT Sales Order	LV-4006-SO	
Barge Name	K 30718B	
Work Order #	LV-4011-WO	

Shop Order & Test Report

Customer:	Kirby Inland Marine		Order#	K 30718B		
Make	Morrison	Size	2.5"	Model#	153B	
Serial #	LV4011-1 thru 6	Inlet	2.5 FNPT	Outlet	NA	· ·
Constrution:	P/V			Cap:	N/A	
Set Pressure:	1.0 psi pressure/1.5 OZ	Z vac	<u>.</u>			
Tag:	¥.		Orifice:	N/A		
Work Require	ed: Complete	e Overhaul	4, 1 V	Test A	<u>r</u>	
Work Require		e Overhaul		Test A	<u>r</u>	
Condition Re		ed Repair			<u>r</u>	
Condition Re	ceived: Nee	ed Repair	Spring	Good Cond.	r	
Condition Red General (Inlet Seats	Condition Pre-repa	ed Repair	Work	Good Cond.		
General (Inlet Seats Guide	Condition Pre-repairing Dirty Dirty Dirty Dirty	ed Repair		Good Cond.	Installed gaskets	
Condition Red General (Inlet Seats	Condition Pre-repa	ed Repair	Work	Good Cond.		
General (Inlet Seats Guide Outlet	Condition Pre-repairing Dirty Dirty Dirty Dirty	ed Repair	Work	Good Cond.		
General (Inlet Seats Guide Outlet	Dirty Dirty Dirty Dirty Dirty Dirty Dirty	ed Repair	Work	Good Cond.		

Final Test Report

Witness/Assy By	112	
	Witness/Assy By	Witness/Assy By

Safety valve inspection report

Certificate nr

Date

354

08-05-2019

Job no.

LV-4006-SO

Client

Valve data

Set pressure (cold)

125 psi

Tag. No.

Serial No.

620767-10-A14

Manufacturer

Type / Model

Farris

26QA10L-120

Size

бхQх8

Rating

150x150

Nozzle / Orifice

Q

Fluid

Air

Barge #

K30718B

Test data

Set pressure test

Found set pressure

124 psi

Reseat pressure (indication)

119 psi

Result

Passed

Seat tightness test

Leakage

0 bubbles/min.

Test pressure

117 psi

Result

Passed

Manual Back Pressure test

BP Pressure


Test method

30 psi

BP Result

Passed



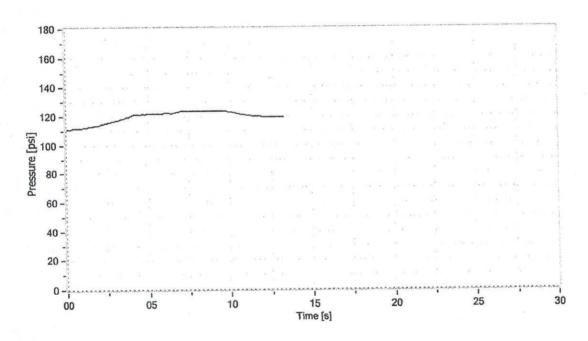

Tested by

Name

Javier Gutierrez

Date

Signature

Inspected by Name

Date

Signature