



**United States of America
Department of Homeland Security
United States Coast Guard**

Certification Date: 07 Feb 2020
Expiration Date: 07 Feb 2021

Temporary Certificate of Inspection

For ships on international voyages this certificate fulfills the requirements of SOLAS 74 as amended, regulation V/14, for a SAFE MANNING DOCUMENT.

This Temporary Certificate of Inspection is issued under the provision of Title 46 United States Code, Section 399, in lieu of the regular certificate of inspection, and shall be in force only until the receipt on board said vessel of the original certificate of inspection, this certificate in no case to be valid after one year from the date of inspection.

Vessel Name	Official Number	IMO Number	Call Sign	Service
KIRBY 30719B	1167900			Tank Barge

Hailing Port	Hull Material	Horsepower	Propulsion
WILMINGTON, DE	Steel		
UNITED STATES			

Place Built	Delivery Date	Keel Laid Date	Gross Tons	Net Tons	DWT	Length
ASHLAND CITY, TN	26May2005	14Apr2005	R-1632	R-1632		R-300.0
UNITED STATES			I-	I-		I-0

Owner	Operator
KIRBY INLAND MARINE LP 55 WAUGH DR STE 1000 HOUSTON, TX 77007 UNITED STATES	KIRBY INLAND MARINE, LP 18350 MARKET STREET CHANNELVIEW, TX 77530 UNITED STATES

This vessel must be manned with the following licensed and unlicensed Personnel. Included in which there must be 0 Certified Lifeboatmen, 0 Certified Tankermen, 0 HSC Type Rating, and 0 GMDSS Operators.

0 Masters	0 Licensed Mates	0 Chief Engineers	0 Oilers
0 Chief Mates	0 First Class Pilots	0 First Assistant Engineers	
0 Second Mates	0 Radio Officers	0 Second Assistant Engineers	
0 Third Mates	0 Able Seamen	0 Third Assistant Engineers	
0 Master First Class Pilot	0 Ordinary Seamen	0 Licensed Engineers	
0 Mate First Class Pilots	0 Deckhands	0 Qualified Member Engineer	

In addition, this vessel may carry 0 Passengers, 0 Other Persons in crew, 0 Persons in addition to crew, and no Others. Total Persons allowed: 0

Route Permitted And Conditions Of Operation:

---Lakes, Bays, and Sounds---

This vessel has been granted a fresh water service examination interval in accordance with 46 CFR 31.10-21(a) (2). If this vessel is operated in salt water more than 6 months in any 12 month period, the vessel must be inspected using salt water intervals per 46 CFR 31.10-21(a) (1) and the cognizant OCMI notified in writing as soon as this change in status occurs.

Thermal fluid heater and generator may only be operated when carrying grade "E" cargoes.

The vessel is inspected and approved for the carriage of grade "E" combustible liquids when transported in molten form at elevated temperatures.

*****SEE NEXT PAGE FOR ADDITIONAL CERTIFICATE INFORMATION*****

With this Inspection for Certification having been completed at Port Arthur, TX, UNITED STATES, the Officer in Charge, Marine Inspection, Marine Safety Unit Port Arthur certified the vessel, in all respects, is in conformity with the applicable vessel inspection laws and the rules and regulations prescribed thereunder.

Annual/Periodic/Re-Inspection				This certificate issued by: <i>J.J. Andrew</i> CDR J.J. ANDREW, CDR, USCG, By direction Officer in Charge, Marine Inspection Marine Safety Unit Port Arthur Inspection Zone
Date	Zone	A/P/R	Signature	



Temporary Certificate of Inspection

Vessel Name: KIRBY 30719B

This tank barge is participating in the Eighth & Ninth Coast Guard District's Tank Barge Streamlined Inspection Program (TBSIP). Inspection activities aboard this barge shall be conducted in accordance with its Tank Barge Action Plan (TAP). Inspection issues concerning this barge should be directed to OCMI Houston-Galveston, TX.

---Hull Exams---

Exam Type	Next Exam	Last Exam	Prior Exam
DryDock	31Dec2024	31Dec2014	26May2005
Internal Structure	31Dec2025	07Feb2020	31Dec2014

--- Liquid/Gas/Solid Cargo Authority/Conditions ---

Authorization: GRADE A AND LOWER AND SPECIFIED HAZARDOUS CARGOES.

Total Capacity	Units	Highest Grade Type	Part151 Regulated	Part153 Regulated	Part154 Regulated
30580	Barrels	A	Yes	No	No

Hazardous Bulk Solids Authority

Loading Constraints - Structural

Tank Number	Max Cargo Weight per Tank (short tons)	Maximum Density (lbs/gal)
1 P/S	817	8.90
2 P/S	817	8.90
3 P/S	784	8.90

Loading Constraints - Stability

Hull Type	Maximum Load (short tons)	Maximum Draft (ft/in)	Max Density (lbs/gal)	Route Description
II	3828	9ft 6in	8.90	
II	3828	9ft 6in	8.90	
III	4837	11ft 6in	8.90	
III	4837	11ft 6in	8.90	

Conditions Of Carriage

Only those cargoes named in the vessel's Cargo Authority Attachment, serial #C1-0504643, dated 26MAY05, and Grade "A" and lower cargoes may be carried.

Benzene Prohibition

Vessel not authorized to carry Benzene or Benzene containing cargoes with a Benzene concentration of 0.5% or more.

The maximum design density of cargo which may be filled to the tank top is 8.745 lbs/gal. Cargoes with higher densities, up to 8.91 lbs/gal may be carried as slack loads, but shall not exceed the tank weight limits as listed above.

--- Inspection Status ---

Cargo Tanks

Tank Id	Internal Exam			External Exam		
	Previous	Last	Next	Previous	Last	Next
1 P/S	26May2005	31Dec2014	31Dec2024	-	-	-
2 P/S	26May2005	31Dec2014	31Dec2024	-	-	-



Temporary Certificate of Inspection

Vessel Name: KIRBY 30719B

Tank Id	Safety Valves	Previous	Last	Next
3 P/S	26May2005	31Dec2014	31Dec2024	-
			Hydro Test	
1 P/S	-	-	-	-
2 P/S	-	-	-	-
3 P/S	-	-	-	-

---Conditional Portable Fire Extinguisher Requirements---

Required Only During Transfer of Cargo or Operation of Barge Machinery

--- Fire Fighting Equipment ---

Number of Fireman Outfits - 0

Fire Extinguishers - Hand portable and semi-portable

Quantity	Class Type
3	40-B

END



Certificate of Inspection

Cargo Authority Attachment

Vessel Name: **KIRBY 30719B**
Official #: **1167900**

Shipyard: **Trinity Ashland City**
Hull #: **4490**

46 CFR 151 Tank Group Characteristics

Tank Group Information		Cargo Identification			Hull Typ	Cargo Seg Tank	Tanks			Cargo Transfer		Environmental Control		Fire Protection Provided	Special Requirements		Elec Haz	Temp Cont
Tnk Grp	Tanks In Group	Density	Press.	Temp.			Type	Vent	Gauge	Restr.	Pipe Class	Cont	Tanks		Handling Space	General		
A	1-3P/S	8.91	Atmos.	Amb.	II	1II 2II	Integral	PV	Restr.	II	G-1	NR	NA	Portable	.50-81(a), .50-81(b), .50-86,	55-1(h), 56-1(a), (c), (d), (e), (f), (g).	NR	No

Notes: 1. Under Environmental Control, Tanks, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo tanks.
2. Under Environmental Control, Handling Space, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo handling space. NA means that the vessel does not have a cargo control space, and this requirement is not applied.
3. Under Electrical Hazard Class, NA means that the tank group is suitable only for those cargoes which have no electrical hazard class requirement. NR means that the vessel has no electrical equipment located in a hazardous location

List of Authorized Cargoes

Cargo Identification							Conditions of Carriage			
Name	Chem Code	Compat Group No	Sub Chapter	Grade	Hull Type	Tank Group	Vapor Recovery		Special Requirements in 46 CFR 151 General and Met's of Construction	
							App'd (Y or N)	VCS Category		

Authorized Subchapter O Cargoes

Acetonitrile	ATN	37	O	C	III	A	No	N/A	No
Adiponitrile	ADN	37	O	E	II	A	No	N/A	No
Alkyl(C7-C9) nitrates	AKN	34 ²	O	NA	III	A	No	N/A	.50-81, .50-88
Butyl acrylate (all isomers)	BAR	14	O	D	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Butyl methacrylate	BMH	14	O	D	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Butyraldehyde (all isomers)	BAE	19	O	C	III	A	No	N/A	.55-1(p)
Camphor oil (light)	CPO	18	O	D	II	A	No	N/A	No
Chemical Oil (refined, containing phenolics)	COD	21	O	E	II	A	No	N/A	.50-73
Coal tar naphtha solvent	NCT	33	O	D	III	A	No	N/A	.50-73
Creosote	CCW	21 ²	O	E	III	A	No	N/A	No
Cresols (all isomers)	CRS	21	O	E	III	A	No	N/A	No
Crotonaldehyde	CTA	19 ²	O	C	II	A	No	N/A	.55-1(p)
Crude hydrocarbon feedstock (containing Butyraldehydes and Ethylpropyl acrolein)	CHG		O	C	III	A	No	N/A	No
Ethyl acrylate	EAC	14	O	C	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Ethylene cyanohydrin	ETC	20	O	E	III	A	No	N/A	No
Ethylene glycol hexyl ether	EGH	40	O	E	III	A	No	N/A	No
Ethylene glycol monoalkyl ethers	EGC	40	O	D/E	III	A	No	N/A	No
Ethylene glycol propyl ether	EGP	40	O	E	III	A	No	N/A	No
2-Ethylhexyl acrylate	EAI	14	O	E	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Ethyl methacrylate	ETM	14	O	D/E	III	A	No	N/A	.50-70(a)
2-Ethyl-3-propylacrolein	EPA	19 ²	O	E	III	A	No	N/A	No
Hydrocarbon 5-9	HFN		O	C	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Isoprene	IPR	30	O	A	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Mesityl oxide	MSO	18 ²	O	D	III	A	No	N/A	No
Methyl acrylate	MAM	14	O	C	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Methylcyclopentadiene dimer	MCK	30	O	C	III	A	No	N/A	No
Methyl methacrylate	MMM	14	O	C	III	A	No	N/A	.50-70(a), .50-81(a), (b)
alpha-Methylstyrene	MSR	30	O	D	III	A	No	N/A	.50-70(a), .50-81(a), (b)
1- or 2-Nitropropane	NPM	42	O	D	III	A	No	N/A	.50-81
1,3-Pentadiene	PDE	30	O	A	III	A	No	N/A	.50-70(a), .50-81
Styrene (crude)	STX		O	D	III	A	No	N/A	No
Styrene monomer	STY	30	O	D	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Tetrahydrofuran	THF	41	O	C	III	A	No	N/A	.50-70(b)
Trisodium phosphate solution	TSP	5	O	NA	III	A	No	N/A	.50-73, .56-1(a), (c)
Vinyl acetate	VAM	13	O	C	III	A	No	N/A	.50-70(a), .50-81(a), (b)
Vinyl neodecanate	VND	13	O	E	III	A	No	N/A	.50-70(a), .50-81(a), (b)



Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 30719B
Official #: 1167900

Page 2 of 3

Shipyard: Trinity Ashland City
Hull #: 4490

Cargo Identification						Conditions of Carriage			
Name	Chem Code	Compat Group No	Sub Chapter	Grade	Hull Type	Tank Group	Vapor Recovery		Special Requirements in 48 CFR 151 General and Mat'ls of Construction
							App'd (Y or N)	VCS Category	



Certificate of Inspection

Cargo Authority Attachment

Vessel Name: **KIRBY 30719B**
Official #: **1167900**

Page 3 of 3

Shipyard: **Trinity Ashland**
Hull #: **4490**

Explanation of terms & symbols used in the Table:

Cargo Identification

Name	The proper shipping name as listed in 48 CFR Table 30.25-1, 48 CFR Table 151.05, and 48 CFR Part 153 Table 2.
Chem Code none	The three letter designation assigned to the cargo in the Chemical Hazards Response Information System (CHRIS) Manual. Certain mixtures of cargoes may not have a CHRIS Code assigned.
Compatibility Group No.	The cargo reactive group number assigned for compatibility determinations in 48 CFR Part 150 Tables I and II. In accordance with 48 CFR 150.130, the Person-in-Charge of the barge is responsible for ensuring that the compatibility requirements of 48 CFR Part 150 are met. Cargoes must be checked for compatibility using the figures, tables, and appendices of 48 CFR 150 in conjunction with the assigned reactive group number.
Note 1	Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Chart. For additional compatibility information, contact Commandant (G-MSO-3), U.S. Coast Guard, 2100 Second Street, SW, Washington, DC 20593-0001 Telephone (202) 267-1217.
Note 2	Those cargoes listed in 48 CFR Part 153 Table 2 are non-regulated cargoes when carried in bulk on non-oceangoing barges. See Appendix I to 48 CFR Part 150 - exceptions to the compatibility chart.
Subchapter Subchapter D Subchapter O Note 3	The subchapter in Title 48 Code of Federal Regulations under which the cargo has been classified. Those flammable and combustible liquids listed in 48 CFR Table 30.25-1. Those hazardous cargoes listed in 48 CFR Table 151.05 and 48 CFR Part 153 Table 2. Those cargoes listed in 48 CFR Part 153 Table 2 are non-regulated cargoes when carried in bulk on non-oceangoing barges.
Grade	The cargo classification assigned to each flammable or combustible liquid. Grades inside of " [] " indicate a provisional assignment based upon literature sources which were not verified by manufacturers data. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo.
A, B, C D, E Note 4	Flammable liquid cargoes, as defined in 48 CFR 30-10.22. Combustible liquid cargoes, as defined in 48 CFR 30-10.15. The flammability/combustibility grade of these cargoes may vary depending upon the flashpoint and Reid vapor pressure. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo.
NA #	Those subchapter O cargoes which are not classified as a flammable or combustible liquid. No flammability/combustibility grade has been assigned yet, as the necessary flash point/vapor pressure data for such assignments are presently not available.
Hull Type I II III NA	The required barge hull classification for carriage of the specified Subchapter O hazardous material cargo, see 48 CFR 151.10-1. Designed to carry products which require the maximum preventive measures to preclude the uncontrolled release of the cargo. See 48 CFR 151.10-1(b)(1). Designed to carry products which require significant preventive measures to preclude the uncontrolled release of cargo. See 48 CFR 151.10-1(b)(3). Designed to carry products of sufficient hazard to require a moderate degree of control. See 48 CFR 151.10-1(b)(4). Not applicable to barges certificated under Subchapter D.

Conditions of Carriage

Tank Group	The vessel's tank group (as defined in Section 4) which is authorized for carriage of the named cargo.
Vapor Recovery Approved (Y or N)	Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo. No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

Conditions of Carriage

Tank Group	The vessel's tank group (as defined under the "48 CFR Tank Group Characteristics" listed on page 1) which is authorized for carriage of the named cargo
Vapor Recovery Approved (Y or N)	Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo. No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.
VCS Category:	The specified cargo's provisional classification for vapor control systems.
Category 1	(No additional VCS requirements above those for benzene, gasoline and crude oil) All requirements applying to the handling of oil and hazardous materials in Titles 33 and 48 Code of Federal Regulations (CFR) apply to these cargoes. Those specifically dealing with vapor control systems are in 33 CFR 155.750, 33 CFR 156.120, 33 CFR 156.170, 48 CFR 35.35 and 48 CFR 39. The cargo tank venting system calculations (48 CFR 39.20-11) and the pressure drop calculations (48 CFR 39.30-1(b)) must use appropriate friction factors, vapor densities and vapor growth rates.
Category 2(Pol)	merizes) Polymerization and residue build-up of these cargoes can adversely affect the vessel by fouling safety components and restricting vapor flow which could lead to cargo tank overpressurization. The vessel's owner must develop a method of ensuring all VCS safety components are functional and polymer build-up is not causing an unsafe condition due to increased pressure in the vapor control piping and cargo tanks. The method shall be acceptable to the local Officer in Charge, Marine Inspection. This is in addition to the requirements of Category 1. Please note that a material not normally considered a monomer can be a problem in detonation
Category 3(HI)	ghly toxic) VCSs for these toxic cargoes cannot use a spill valve or rupture disk as the primary means to meet the overfill protection requirement of 48 CFR 39.20-9. This requirement is in addition to the requirements of Category 1.
Category 4(Pol)	merizes and highly toxic) Must comply with requirements of Categories 1, 2 and 3.
Category 5	(High vapor pressure) VCS pressure drop calculations for cargoes with a vapor pressure greater than 14.7 psia at 115 F must take into account increased vapor-air mixture densities and vapor growth rates as compared to Category 1 cargoes. Consult the Marine Safety Center's VCS Guidelines for further information. This requirement is in addition to the requirements of Category 1.
Category 6	(High vapor pressure and highly toxic) Must comply with requirements of Categories 1, 3 and 5.
Category 7	(High vapor pressure and polymerizes) Must comply with requirements of Categories 1, 2 and 5
none	The cargo has not been evaluated/classified for use in vapor control systems.

Safety valve inspection report

Certificate nr 722
Date 01-30-2020

Job no. LV-5298-SO
Client Kirby

Valve data

Set pressure (cold) 125 psi
Tag. No.
Serial No. 602426-16-A14
Manufacturer Farris
Type / Model 26QA10L-120

Size 6x8
Rating 150x150
Nozzle / Orifice Q
Fluid Air
Barge # KIRBY 30719B

Test data

Set pressure test


Found set pressure 125 psi
Reseat pressure (indication) 121 psi
Result Passed
Test method Air

Seat tightness test

Leakage 0 bubbles/min.
Test pressure 119 psi
Result Passed

Manual Back Pressure test

BP Pressure 30psi
BP Result Passed

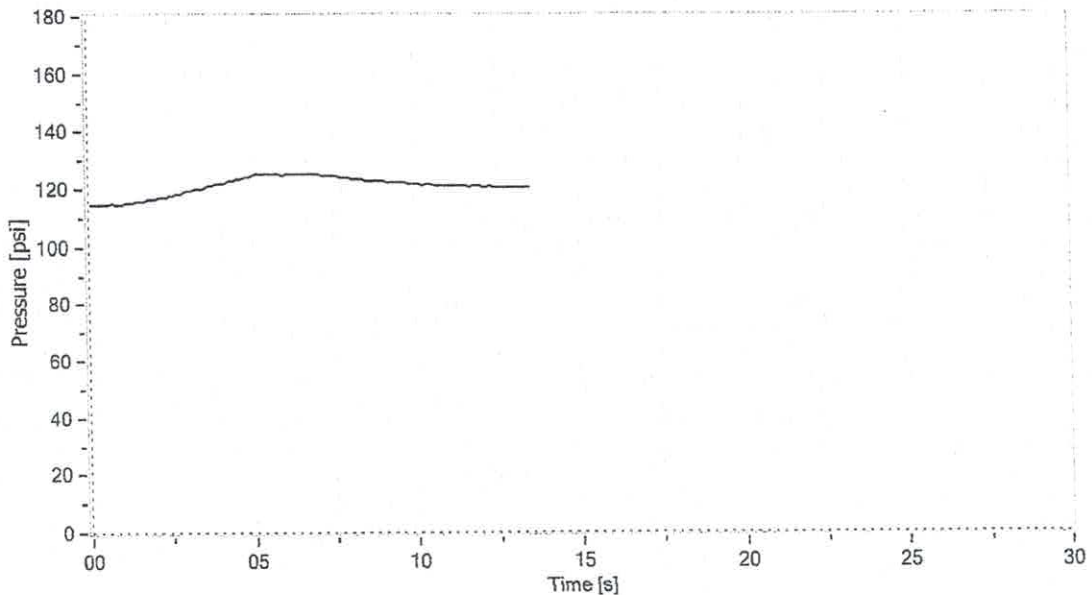

Tested by
Name David Theiler
Date 1-30-2020
Signature *[Handwritten Signature]*

Inspected by
Name
Date
Signature

Law Valve of Texas

16917 Market St, Channelview, TX 77530
(713)453-0413

LVT Sales Order LV-5298-SO
Barge Name Kirby 30719B
Work Order # _____

Shop Order & Test Report

Customer:	Kirby Inland Marine	Order #	
Make	Morrison	Size	2.5"
Model #		Model #	153B
Serial #	5298-1 thru 6	Inlet	2.5 FNPT
Outlet		Outlet	NA
Constrution:	P/V	Cap:	N/A
Set Pressure:	1.0 psi pressure/1.5 OZ vac		
Tag:		Orifice:	N/A
Work Required:	Complete Overhaul	Test Air	
Condition Received:	Need Repair		

General Condition Pre-repair

Inlet	Dirty	Spring	Good Cond.
Seats	Dirty	Work	ST
Guide	Dirty	Repairs	Lapped Seats Installed gaskets
Outlet	Dirty		

Parts replaced and other work: _____

Final Test Report

Date	1/30/2020
Set Pressure	1.0 psi pressure/1.5 OZ vac
Nozzle Ring Setting	N/A
Back Pressure	N/A
Tested By:	<i>Raymond Vallach</i>

Witness/Assy By

Joe R...

U.S. Coast Guard Witness