

United States of America Department of Homeland Security United States Coast Guard

16 Oct 2024 Certification Date: **Expiration Date:** 16 Oct 2025

Temporary Certificate of Inspection

Vessel Name: KIRBY 28107

This tank barge is participating in the Eighth and Ninth Coast Guard Districts' Tank Barge Streamlined Inspection Program (TBSIP). Inspection activities aboard this barge shall be conducted in accordance with its Tank Barge Action Plan (TAP). Inspection issues concerning this barge should be directed to OCMI Houston-Galveston.

---Hull Exams---

Exam Type

Next Exam

Last Exam

Prior Exam

DryDock

31Oct2029

11Oct2019

14Jul2009

Internal Structure

31Oct2029

16Oct2024

11Oct2019

--- Liquid/Gas/Solid Cargo Authority/Conditions ---

Authorization:

GRADE A AND LOWER AND SPECIFIED HAZARDOUS CARGOES

Total Capacity

Highest Grade Type Part151 Regulated Part153 Regulated Part154 Regulated

28500

Barrels

No

No

Hazardous Bulk Solids Authority

Not Authorized

Loading Constraints - Structural

Tank Number	Max Cargo Weight per Tank (short tons)	Maximum Density (lbs/gal)
1 P/S	838	8.74
2 P/S	843	8.74
3 P/S	777	8.74

Loading Constraints - Stability

Hull Type	Maximum Load (short tons)	Maximum Draft (ft/in)	Max Density (lbs/gal)	Route Description
II	3804	10ft 0in	13.6	R,LBS
III	4680	11ft 9in	13.6	R,LBS

Conditions Of Carriage

Only those cargoes named in the vessel's Cargo Authority Attachment (CAA), Serial # C1-0901515, dated May 15, 2009, may be carried, and then only in the tanks indicated. When the vessel is carrying cargoes containing greater than 0.5% benzene, the person in charge is responsible for ensuring the provisions of 46 CFR 197, Subpart C are applied.

Per 46 CFR 150.130, the Person in Charge of the vessel is responsible for ensuring that the compatibility requirements of 46 CFR 150 are met. Cargoes must be checked for compatibility using the figures, tables, and appendices of 46 CFR 150 in conjunction with the compatibility group numbers from the "Compat Group No" column listed in the vessel's CAA.

The maximum design density of cargo which may be filled to the tank top is 8.74 lbs/gal. Cargoes with higher densities, up to 13.6 lbs/gal, may be carried as slack loads, but shall not exceed the tank weight limits as listed above.

Per 46 CFR 151.10-15(c)(2) the max tank weights reflect uniform (within 5%) loading at the deepest draft allowed. When carrying Subchapter O cargoes at shallower drafts, the barge(s) should always be loaded uniformly.



United States of America Department of Homeland Security United States Coast Guard

Certification Date: 16 Oct 2024 **Expiration Date:** 16 Oct 2025

Temporary Certificate of Inspection

For ships on international voyages this certificate fulfills the requirements of SOLAS 74 as amended, regulation V/14, for a SAFE MANNING DOCUMENT.

This Temporary Certificate of Inspection is issued under the provision of Title 46 United States Code, Section 399, in lieu of the regular certificate of inspection, and shall be in force only until the receipt on board sald vessel of the original certificate of inspection, this certificate in no case to be valid after one year from the date of inspection. Official Number IMO Number Vessel Name Tank Barge 1219325 KIRBY 28107 Hailing Port Propulsion Horsepower Hull Material WILMINGTON, DE Steel **UNITED STATES** Place Built DWT Keel Laid Date Net Tons Length **Delivery Date Gross Tons** ASHLAND CITY, TN R-300.0 R-1632 R-1632 14Jul2009 06May2009 1-0 UNITED STATES Operator Owner KIRBY INLAND MARINE LP KIRBY INLAND MARINE, LP 55 WAUGH DR STE 1000 18350 MARKET STREET CHANNELVIEW, TX 77530 HOUSTON, TX 77007 UNITED STATES UNITED STATES This vessel must be manned with the following licensed and unlicensed Personnel. Included in which there must be Certified Lifeboatmen, 0 Certified Tankermen, 0 HSC Type Rating, and 0 GMDSS Operators. 0 Chief Engineers 0 Oilers 0 Licensed Mates 0 Masters 0 First Class Pilots 0 First Assistant Engineers 0 Chief Mates 0 Second Mates 0 Radio Officers 0 Second Assistant Engineers 0 Third Assistant Engineers 0 Third Mates 0 Able Seamen 0 Licensed Engineers 0 Master First Class Pilot 0 Ordinary Seamen 0 Deckhands 0 Qualified Member Engineer 0 Mate First Class Pilots In addition, this vessel may carry 0 Passengers, 0 Other Persons in crew, 0 Persons in addition to crew, and no Others. Total Persons allowed: 0 Route Permitted And Conditions Of Operation: ---Lakes, Bays, and Sounds---Also, in fair weather only, limited coastwise, not more than twelve (12) miles from shore between St. Marks and Carrabelle, Florida. This vessel has been granted a fresh water service examination interval in accordance with 46 CFR 31.10-21(a) (2). If this vessel is operated in salt water more than six (6) months in any twelve (12) month period, the vessel must be inspected using salt water intervals per 46 CFR 31.10-21(a)(1) and the cognizant OCMI must be notified in writing as soon as this change in status occurs. ***SEE NEXT PAGE FOR ADDITIONAL CERTIFICATE INFORMATION*** With this Inspection for Certification having been completed at Freeport, TX, UNITED STATES, the Officer in Charge, Marine Inspection, Houston-Galveston certified the vessel, in all respects, is in conformity with the applicable vessel inspection laws and the rules and regulations prescribed thereunder. This certificate issued by: B. P. Bergow Annual/Periodic/Re-Inspection B.P. BERGAN CDR, USCG, BY DIRECTION A/P/R Signature Date Zone Officer in Charge, Marine Inspection Houston-Galveston Inspection Zone



United States of America Department of Homeland Security United States Coast Guard

Certification Date: 16 Oct 2024 Expiration Date: 16 Oct 2025

Temporary Certificate of Inspection

Vessel Name: KIRBY 28107

Vapor Control Authorization

In accordance with 46 CFR Part 39, excluding part 39.4000, this vessel's vapor collection system (VCS) has been inspected to the plans approved by MSC Letter #C1-0901515, dated May 15, 2009 and has been found acceptable for the collection of bulk liquid cargo vapors annotated with "Yes" in the CAA's VCS column. The VCS system has been approved with a pressure side of 6 psig P/V valve with Coast Guard Approval 162.017/167/2. The cargo tank top is suitable for a maximum allowable working pressure (MAWP) of 6.5 psig.

In accordance with 46 CFR Part 39.5000, this vessel's VCS has been evaluated and approved for multi-breasted tandem loading with other vessels specifically approved by Marine Safety Center letter Serial No. C2-0902658 dated September 25, 2009.

--- Inspection Status ---

Cargo Tanks

	Internal Exam	i.		External Exar	n	
Tank Id	Previous	Last	Next	Previous	Last	Next
1 P/S	14Jul2009	11Oct2019	31Jul2029	11Oct2019	16Oct2024	31Oct2029
2 P/S	14Jul2009	11Oct2019	31Jul2029	11Oct2019	16Oct2024	31Oct2029
3 P/S	14Jul2009	11Oct2019	31Jul2029	11Oct2019	16Oct2024	31Oct2029
			Hydro Test			
Tank Id	Safety Valves	6	Previous	Last	Next	
P/S	-		-	- -3	- :	
2 P/S	-		-	¥:	4	
3 P/S	-				-2	

---Conditional Portable Fire Extinguisher Requirements---

Required Only During Transfer of Cargo or Operation of Barge Machinery

--- Fire Fighting Equipment ---

Fire Extinguishers - Hand portable and semi-portable

Quantity

Class Type

2

40-B

END



Serial #: C1-0901515

15-May-09

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Shipyard: TRINITY ASHLAND

CITY

Hull #: 4619

Official #: 121932	25													Hull	#: 4619		
46 CFR 151 Tank	Group (Chara	cteris	ics													
Tank Group Information	Cargo I	dentificati	ion				Tanks		Cargo Transfer				Fire	Special Require	ments		
Tnk Grp Tanks in Group	Density	Press.	Temp.	Hull Typ	Seg Tank	Туре	Vent	Gauge	Pipe Class	Cont	Tanks	Handling Space	Protection Provided	General	Materials of Construction	Elec	Temp Cont
A #1P/S, #2P/S, #3P/S	13.6	Atmos.	Amb.	11	1ii 2ii	Integral Gravity	PV	Closed	11	G-1	NR	NA	Portable	.50-60, .50-70(a), .50-70(b), .50-73, .50-81(a), .50- 81(b),	55-1(b), (c), (e), (f), (h), (j), 56-1(a), (b), (c), (d), (e), (f), (g),	NR	No

Notes: 1. Under Environmental Control, Tanks, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo tanks.

2. Under Environmental Control, Handling Space, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo handling space. NA means that the vessel does not have a cargo control space, and this requirement is not applied.

3. Under Electrical Hazard Class, NA means that the tank group is suitable only for those cargoes which have no electrical hazard class requirement. NR means that the vessel has no electrical equipment located in a hazardous location.

List of Authorized Cargoes

Cargo Identification	Conditions of Carriage									
	T						Vapor Re	covery	Pro Commercial Commerc	
Name	Chem Code	Compat Group No	Sub Chapter	Grade	Hull Type	Tank Group	App'd (Y or N)	VCS Category	Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Perio
authorized Subchapter O Cargoes						J.				
Acetonitrile	ATN	37	0	С	111	Α	Yes	3	No	G
Acrylonitrile	ACN	15 ²	0	С	- 11	A	Yes	4	.50-70(a), .55-1(e)	G
Adiponitrile	ADN	37	0	E	- 11	A	Yes	1	No See See See See See See See See See Se	G
Alkyl(C7-C9) nitrates	AKN	34 2	0	NA	111	A	No	N/A		G
Aminoethylethanolamine	AEE	8	0	Е	111	Α	Yes	1	.55-1(b)	
Ammonium bisulfite solution (70% or less)	ABX	43 2	0	NA	111	Α	No	N/A		G
Ammonium hydroxide (28% or less NH3)	AMH	6	0	NA	111	Α	No	N/A		G
Anthracene oil (Coal tar fraction)	AHO	33	0	NA	11	Α	No	N/A		
Benzene	BNZ	32	0	С	III	Α	Yes	1	.50-60	G
Benzene or hydrocarbon mixtures (having 10% Benzene or more)	внв	32 2	0	С	H	Α	Yes	1	.50-60	G
Benzene or hydrocarbon mixtures (containing Acetylene and 10% Benzene or more)	ВНА	32 2	0	С	111	Α	Yes	1	.50-60, .56-1(b), (d), (f), (g)	G
Benzene, Toluene, Xylene mixtures (10% Benzene or more)	BTX	32	0	B/C	111	Α	Yes	1	.50-60	G
Butyl acrylate (all isomers)	BAR	14	0	D	III	Α	Yes	2	.50-70(a), .50-81(a), (b)	G
Butyl methacrylate	BMH	1 14	0	D	111	Α	Yes	2	.50-70(a), .50-81(a), (b)	G
Butyraldehyde (all isomers)	BAE	19	0	С	111	Α	Yes	1	.55-1(h)	G
Camphor oil (light)	CPC	18	0	D	- 11	Α	No	N/A	A No	G
Carbon tetrachloride	CBT	36	0	NA	111	Α	No	N/	The Committee of the Co	G
Caustic potash solution	CPS	5 5 2	0	NA	111	Α	No	N/		G
Caustic soda solution	CSS	5 5 2	. 0	NA	111	Α	No	N/		G
Chemical Oil (refined, containing phenolics)	CO	D 21	0	E	11	Α	No	N/	and the state of the people of the last of the state of t	G
Chlorobenzene	CRI	B 36	0	D	111	Α	Yes		No	G
Chloroform	CRI	F 36	0	NA	111	Α	Yes	3	No	G
Coal tar naphtha solvent	NC.	T 33	0	D	111	Α	Yes	s 1	.50-73	G
Creosote	CC	W 21	2 0	E	111	Α	Yes	s 1	No	G
Cresols (all isomers)	CR	S 21	0	E	111	1 A	Yes	s 1	No	G
	CS		0	NA	(1)	I A	No	N	/A .50-73, .55-1(b)	G
Cresylate spent caustic	CR		0	Е	111	I A	Ye	s 1	.55-1(f)	G
Cresylic acid tar	СТ		2 0	С	11	Α	Ye	s 4	.55-1(h)	G
Crude hydrocarbon feedstock (containing Butyraldehydes and	СН		0	С	- 11	I A	No	N	/A No	G
Ethylpropyl acrolein)	2557			D	11		Ye	s 1	.56-1(a), (b)	G
Cyclohexanone	CC		2 0	4 4 4 4 4 4 4 4 4	Company of the last				.56-1 (b)	G
Cyclohexanone, Cyclohexanol mixture	CY			E	- 11			-	.56-1(a), (b), (c), (g)	G
Cyclohexylamine	CH		0	D	- 11					9
Cyclopentadiene, Styrene, Benzene mixture	CS	B 30	0	D	- 1)	I A	Ye	s 1	100-001 100 1101	

Serial #: C1-0901515

15-May-09



Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Shipyard: TRINITY ASHLAND

Hull #: 4619

Official #: 1219325

Mesityl oxide

Page 2 of 8

Cargo Identification	Ĭ						Conditions of Carriage						
Name	Chem	Compat Group No		er Gra	de Tv	lull /be	Tank Group A	App'd (Y or N) (Yes	VCS Category 2	151	cial Requirements in 46 CFR General and Mat'ls of 0-70(a), .50-81(a), (b), .55-1(c)	Insp. Period G	
so-Decyl acrylate	IA1	14	0	E		111	A	Yes	3	.5	6-1(a), (b)	G	
ichlorobenzene (all isomers)	DBX	36	0			III	A	Yes	1	N		G	
,1-Dichloroethane	DCH	36	0	C		11	A	Yes	1	.5	5-1(f)	G	
,2'-Dichloroethyl ether	DEE	41	0			111	A	Yes	5	N	0	G	
pichloromethane	DCM		0	N		III	A	No	N/A	.5	6-1(a), (b), (c), (g)	G	
,4-Dichlorophenoxyacetic acid, diethanolamine salt solution	DDE	43	0	E				No	N/A		56-1(a), (b), (c), (g)	G	
,4-Dichlorophenoxyacetic acid, dimethylamine salt solution	DAD	0 1		A		111	A		N/A		56-1(a), (b), (c), (g)	G	
,4-Dichlorophenoxyacetic acid, triisopropanolamine salt solution	DTI	43 2		E		III	Α	No	3	N	The state of the s	G	
,1-Dichloropropane	DPB	36	0	C		HI	Α	Yes	3		ło	G	
,2-Dichloropropane	DPP		0	C		111	A	Yes	3		No.	G	
,3-Dichloropropane	DPC		0	0		Ш	A	Yes			No	G	
,3-Dichloropropene	DPU	15	0			11	A	Yes	4		No .	G	
Dichloropropene, Dichloropropane mixtures	DMX	(15	0			11	Α	Yes	1			G	
Diethanolamine	DEA	. 8	0			111	A	Yes	1		55-1(c)	G	
Diethylamine	DEN	7	0			Ш	Α	Yes	3		55-1(c)	G	
Diethylenetriamine	DET	7	2 C	E		111	Α	Yes	1		.55-1(c)	G	
Diisobutylamine	DBL	J 7	C	1)	111	Α	Yes			.65-1(c)	G	
Diisopropanolamine	DIP	8	C		E	111	Α	Yes			.55-1(c)	- 100	
Disopropylamine	DIA	7	C)	2	11	Α	Yes	577.7	_	.55-1(c)	G	
N,N-Dimethylacetamide	DAG	10	C)	E	Ш	Α	Yes	3		.56-1(b)		
Dimethylethanolamine	DM	B 8	()	D	III	Α	Yes	1		.56-1(b), (c)	G	
	DM	F 10	()	D	111	Α	Yes	1		,55-1(e)	G	
Dimethylformamide	DN	A 7	()	С	11	Α	Yes	3		.55-1(c)	G	
Di-n-propylamine	DO		()	E	Ш	Α	No	N	/A	.56-1(b)	G	
Dodecyldimethylamine, Tetradecyldimethylamine mixture	DO		()	#	11	Α	No	N	I/A	No	G	
Dodecyl diphenyl ether disulfonate solution	EE)	D	111	Α	No	N	I/A	No	G	
EE Glycol Ether Mixture	ME			5	E	111	Α	Yes	s 1	<u></u>	.55-1(c)	G	
Ethanolamine	EA)	С	111	Α	Ye	s 2		.50-70(a), .50-81(a), (b)	G	
Ethyl acrylate	EA			0	A	-11	Α	Ye	s 6		.65-1(b)	G	
Ethylamine solution (72% or less)	EB			0	D	111	А	Ye	s 3	3	,55-1(b)	G	
N-Ethylbutylamine	EC			0	D	m	Α	Ye	s 1		.55-1(b)	G	
N-Ethylcyclohexylamine	ET			0	E	111	A	Ye	s 1		No	G	
Ethylene cyanohydrin	ED		A CONTRACTOR OF	0	D	111	А	Ye	s 1	1	55-1(c)	C	
Ethylenediamine	EC			0	C	111	A		s '	1	No	C	
Ethylene dichloride	EC			0	E	111) 1	N/A	No	(
Ethylene glycol hexyl ether	EC			0	D/E	10			es	1	No		
Ethylene glycol monoalkyl ethers		3P 4		0	E	111			-	1	No		
Ethylene glycol propyl ether				0	E	111				2	.50-70(a), .50-81(a), (b)		
2-Ethylhexyl acrylate	EA			0	D/E	111				2	.50-70(a))	
Ethyl methacrylate		TM 1				111				1	No		
2-Ethyl-3-propylacrolein	and bearings		9 2	0	E D/E	- 11			-	1	.55-1(h)		
Formaldehyde solution (37% to 50%)			9 2	0	D/E	_				1	.55-1(h)		
Furfural			9	0	D	- 11				N/A	No		
Glutaraldehyde solution (50% or less)			9	0	NA	- 11				1	,55-1(c)		
Hexamethylenediamine solution			7	0	E	- 11		37	es		.56-1(b), (c)		
Hexamethyleneimine	Н	MI	7	0	С	- 11	-		es	1	.50-70(a), .50-81(a), (b)		
Hydrocarbon 5-9	Н	IFN		0	С	- 11			es	1_	.50-70(a), .50-81(a), (b)		
	11	PR :	30	0	Α	- 1			'es	7			
Isoprene Isoprene, Pentadiene mixture	IF	PN		0	В	1	11	A N	10	N/A	50 70 50 4(a) (a) (a)		
Kraft pulping liquors (free alkali content 3% or more)(including: B Green, or White liquor)	lack, K	(PL	5	0	NA				10	N/A			
Macital oxide	N	uso.	18 2	0	D	1	11	Α `	/es	1_	No		

Certificate of Inspection

C1-0901515 15-May-09

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Shipyard: TRINITY ASHLAND

CITY

Hull #: 4619

Official #: 1219325

Page 3 of 8

Cargo Identification	1						Conditions of Carriage					
Name	Chem Code MAM	Compat Group No 14	Sub Chapter O	Grade C	Hull Type III	Tank Group A		CS S	Special Requirements in 46 CFR 151 General and Mat'ls of .50-70(a), .50-81(a), (b)	Insp. Period G		
Methyl acrylate	MCK	30	0	С	111	Α	Yes	1	No	G		
Methylcyclopentadiene dimer	MDE	8	0	E	111	Α	Yes	1	.56-1(b), (c)	G		
lethyl diethanolamine	MEP	9	0	E	111	A	Yes	1	.55-1(e)	G		
-Methyl-5-ethylpyridine	MMM		0	c	111	A	Yes	2	.50-70(a), .50-81(a), (b)	G		
Methyl methacrylate	MPR	9	0	D	111	A	Yes	3	.55-1(c)	G		
-Methylpyridine	MSR	20020	0	D	111	A	Yes	2	.50-70(a), .50-81(a), (b)	G		
Ipha-Methylstyrene	MPL	7 2	-0	D	111	A	Yes	1	.55-1(c)	G		
Morpholine			0	D	111	A	Yes	1	.50-81	G		
- or 2-Nitropropane	NPM	30	0	A	III	A	Yes	7	.50-70(a), .50-81	G		
1,3-Pentadiene	PDE				111		No	N/A	No	G		
Perchloroethylene	PER	36	0	NA		A		1	.55-1(e)	G		
Polyethylene polyamines	PEB	7 2	0	E	- 111	A	Yes		.55-1(c)	G		
so-Propanolamine	MPA		0	E	III	Α	Yes	1	HILL THE PARTY OF	G		
Propanolamine (iso-, n-)	PAX		0	E	111	A	Yes	1	.56-1(b), (c)	G		
so-Propylamine	IPP	7	0	Α	11	Α	Yes	5	.55-1(c)	G		
Pyridine	PRD	9	0	С	111	Α	Yes	1	.55-1(e)	-		
Sodium acetate, Glycol, Water mixture (3% or more Sodium Hydroxide)	SAP		0		111	A	No	N/A	.50-73, .55-1(j)	G		
Sodium aluminate solution (45% or less)	SAU		0	NA	111	A	No	N/A	Water Committee	G		
Sodium chlorate solution (50% or less)	SDD	0 1	2 0	NA	111	Α	No	N/A		G		
Sodium hypochlorite solution (20% or less)	SHO	5	0	NA	111	Α	No	N/A		G		
Sodium sulfide, hydrosulfide solution (H2S 15 ppm or less)	SSF	1 01	,2 0	NA	111	Α	Yes	1	.50-73, .55-1(b)	G		
Sodium sulfide, hydrosulfide solution (H2S greater than 15 ppm but less than 200 ppm)	SSI	0 1	.2 0	NA	Ш	Α	No	N/A	.50-73, .55-1(b)	G		
Sodium sulfide, hydrosulfide solution (H2S greater than 200 ppm)	SSJ	0	1,2 0	NA	H	Α	No	N/A	.50-73, .55-1(b)	G		
Styrene (crude)	STX	(0	D	111	Α	Yes	2	No	G		
Styrene monomer	STY	30	0	D	111	Α	Yes	2	.50-70(a), .50-81(a), (b)	G		
1,1,2,2-Tetrachloroethane	TEC	36	0	NA	111	Α	No	N/A	No	G		
Tetraethylenepentamine	TTF	7	0	E	III	Α	Yes	1	.55-1(c)	G		
Tetrahydrofuran	THE	= 41	0	С	111	А	Yes	1	.50-70(b)	G		
Toluenediamine	TD		0	E	11	Α	No	N/A	.50-73, .56-1(a), (b), (c), (g)	G		
1.2.4-Trichlorobenzene	TCI		0	E	111	А	Yes	1	No	G		
****	TC		0	NA			Yes	1	.50-73, .56-1(a)	G		
1,1,2-Trichloroethane	TC		12.50	NA			Yes	1	No	G		
Trichloroethylene	TC		0	E	11	A		3	.50-73, .56-1(a)	G		
1,2,3-Trichloropropane	TE			E	111			1	,55-1(b)	G		
Triethanolamine	TE		0		11			3	.55-1(e)	G		
Triethylamine	TE	4-4-	0.11	-	11	- A	and the second	1	.55-1(b)	G		
Triethylenetetramine			0					N/	Δ .56-1(a), (b), (c)	G		
Triphenylborane (10% or less), caustic soda solution	TP							N/		G		
Trisodium phosphate solution	TS				7					G		
Urea, Ammonium nitrate solution (containing more than 2% NH3)	UA	arment it has	0					N/		G		
Vanillin black liquor (free alkali content, 3% or more).	VB			17.55				N/	.50-70(a), .50-81(a), (b)	G		
Vinyl acetate	VA				11			2	0.00 000 000	G		
Vinyl neodecanate	VN				11			N/				
Vinyltoluene	VN	IT 13	С	D	11	I A	Yes	2	.50-70(a), .50-81, .56-1(a), (b), (c), (G		
Subchapter D Cargoes Authorized for Vapor Cor			eneral b	d I ameng m								
Acetone	ACT			С		A	Yes	1				
Acetophenone	ACE	2 18	D	E		Α	Yes	1		(())(1)()()()()()()()()()()()()()()()()		
Alcohol(C12-C16) poly(1-6)ethoxylates	API	J 20	D	E		Α	Yes	1				
Alcohol(C6-C17)(secondary) poly(7-12)ethoxylates	AE	3 20	D	E		Α	Yes	1				

Department of Homeland Security **United States Coast Guard** Serial #: C1-0901515

15-May-09



Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Shipyard: TRINITY ASHLAND

CITY Hull #: 4619

Official #: 1219325

Page 4 of 8

Cargo Identification								Conditions of Carriage							
Name	Chem	Compat Group No	Sub Chaoter D	Grade D	Hull Type	Tank Groun A	App'd (Y or N) Yes	VCS Category	Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Period					
myl acetate (all isomers)	AEC	34	-		-	A	Yes	1							
myl alcohol (iso-, n-, sec-, primary)	AAI	20	D	D		() () () () () () () () ()	-	1							
enzyl alcohol	BAL	21	D	E		Α	Yes	1							
rake fluid base mixtures (containing Poly(2-8)alkylene(C2-C3) lycols, Polyalkylene(C2-C10) glycol monoalkyl(C1-C4) ethers, and leir borate esters)	BFX	20	D	Ε		A	Yes								
utyl acetate (all isomers)	BAX	34	D	D		Α	Yes	1							
utyl alcohol (iso-)	IAL	20 2	D	D		Α	Yes	1_							
tutyl alcohol (n-)	BAN		D	D		Α	Yes	1							
Butyl alcohol (sec-)	BAS		D	С		Α	Yes	1							
	BAT		D	С		Α	Yes	1							
Butyl alcohol (tert-)	BPH	34	D	E		Α	Yes	1							
Butyl benzyl phthalate	BUE	32	D	D		Α	Yes	1							
Butyl toluene	CLS	22	D	E		Α	Yes	1		100					
Caprolactam solutions	CHX	31	D	С		A	Yes	1							
Cyclohexane	CHN	20	D	E		A	Yes	1							
Cyclohexanol	CPD	30	D	D/E	-	A	Yes	2							
1,3-Cyclopentadiene dimer (molten)			D	D		A	Yes								
p-Cymene	CMP			E		A	Yes								
iso-Decaldehyde	IDA	19	D	E	-	A	Yes								
n-Decaldehyde	DAL	19	D	D		A	Yes	-							
Decene	DCE		D				Yes								
Decyl alcohol (all isomers)	DAX		D	E		A									
n-Decylbenzene, see Alkyl(C9+)benzenes	DBZ		D	E		A	Yes								
Diacetone alcohol	DAA	20 2	D	D		A	Yes								
ortho-Dibutyl phthalate	DPA	34	D	E		Α	Yes		The state of the s						
Diethylbenzene	DEB		D	D		Α	Yes			.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,					
Diethylene glycol	DEG	40 ²	D	Ε		Α	Ye								
Diisobutylene	DBL	. 30	D	С		A	Ye								
Diisobutyl ketone	DIK	18	D	D		Α	Ye								
Diisopropylbenzene (all isomers)	DIX	32	D	E		Α	Ye								
Dimethyl phthalate	DTL	. 34	D	E		Α	Ye	s 1							
Dioctyl phthalate	DO	P 34	D	Ε		Α	Ye	s 1							
Dipentene	DPI	٧ 30	D	D		Α	Ye	s 1							
	DIL	32	D	D/E	Ξ	Α	Ye	s 1							
Diphenyl Diphenyl ether mixtures	DD	0 33	D	E		Α	Ye	s 1							
	DPI	E 41	D	{E	}	Α	Ye	s 1							
Diphenyl ether	DP	G 40	D	E		Α	Ye	s 1							
Dipropylene glycol	DF		D	Е		Α	Ye	es 1							
Distillates: Flashed feed stocks	DS	R 33	D	E		Α	Ye	es 1							
Distillates: Straight run	DO		D	D		Α	Y	es 1							
Dodecene (all isomers)	DD		D	E		A	Y	es 1							
Dodecylbenzene, see Alkyl(C9+)benzenes	EE		D	D		A		es 1							
2-Ethoxyethyl acetate	1000		D	E		A		es 1							
Ethoxy triglycol (crude)	ET			C		A		es 1							
Ethyl acetate	ET														
Ethyl acetoacetate	EA			-		A									
Ethyl alcohol	EA			-		A									
Ethylbenzene	ET					A									
Ethyl butanol	EE	3T 20	D			Α			- Chamber of the Color						
Ethyl tert-butyl ether	EE	BE 41	D			Α			1						
Ethyl butyrate	E	3R 34	D	D		A			1						
Ethyl cyclohexane	E	CY 31	D	D	r)	A	Y Y	'es	1						



Serial #: C1-0901515 Dated:

15-May-09

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Shipyard: TRINITY ASHLAND

CITY Hull #: 4619

Official #: 1219325

Cargo Identification	on .					Conditions of Carriage						
	Chem	Compat	Sub	01	Hull	Tank	App'd	Recovery VCS	Special Requirements in 46 CFR	Insp.		
Name Ethylene glycol	EGL	Group No	Chapter	Grade	Type	Groun	(Y or N) Yes	Category 1	151 General and Mat'ls of	Perin		
Ethylene glycol butyl ether acetate	EMA	34	D	E		A	Yes	1				
Ethylene glycol diacetate	EGY	34	D	E		A	Yes	1				
Ethylene glycol phenyl ether	EPE	40	D	E		A	Yes	1				
Ethyl-3-ethoxypropionate	EEP	34	D	D		A	Yes	1				
2-Ethylhexanol	EHX	20	D	E		A	Yes	1	The second secon			
Ethyl propionate	EPR	34	D	C		A	Yes	1				
Ethyl toluene	ETE	32	D	D		A	Yes	1				
Formamide	FAM	10	D	E		A	Yes	1				
Furfuryl alcohol	FAL	20 2	D	E		A	Yes	1				
Gasoline blending stocks: Alkylates	GAK	33	D	A/C								
	GRF	-			-	A	Yes	1				
Gasoline blending stocks: Reformates		33	D	A/C		Α	Yes	1				
Gasolines: Automotive (containing not over 4.23 grams lead per gallon)	GAT	33	D	С		Α	Yes	1				
Gasolines: Aviation (containing not over 4.86 grams of lead per gallon)	GAV	33	D	С		A	Yes	1				
Gasolines: Casinghead (natural)	GCS	33	D	A/C		Α	Yes	1				
Gasolines: Polymer	GPL	33	D	A/C	14.00 LIFE	Α	Yes	1				
Gasolines: Straight run	GSR	33	D	A/C		Α	Yes	1				
Glycerine	GCR	20 2	D	E		Α	Yes	1				
Heptane (all isomers), see Alkanes (C6-C9) (all isomers)	HMX	31	D	С		Α	Yes	1				
Heptanoic acid	HEP	4	D	E		Α	Yes	1				
Heptanol (all isomers)	HTX	20	D	D/E		Α	Yes	1				
Heptene (all isomers)	HPX	30	D	С		Α	Yes	2				
Heptyl acetate	HPE	34	D	E		Α	Yes	1				
Hexane (all isomers), see Alkanes (C6-C9)	HXS	31 2	D	B/C	-	Α	Yes	1				
Hexanoic acid	нхо	4	D	E		Α	Yes	1				
Hexanol	HXN	20	D	D		Α	Yes	1				
Hexene (all isomers)	HEX	30	D	С		Α	Yes	2				
Hexylene glycol	HXG	20	D	E		Α	Yes	1				
Isophorone	IPH	18 2	D	E		A	Yes	1				
Jet fuel: JP-4	JPF	33	D	E	-	A	Yes	1				
Jet fuel: JP-5 (kerosene, heavy)	JPV	33	D	D		A	Yes	1				
Kerosene	KRS	33	D	D		A	Yes	1	TO 1	-		
Methyl acetate	MTT	34	D	D		A	Yes	1	VIII. CO. TOTAL DESCRIPTION OF THE PARTY OF			
Methyl alcohol	MAL	20 2	D	C		A	Yes	1				
Methylamyl acetate	MAC		D	D		A	Yes	1				
Methylamyl alcohol	MAA		D	D		A	Yes	1				
Methyl amyl ketone	MAK		D	D	-	A	Yes	1				
Methyl tert-butyl ether	MBE		D	C			-					
Methyl butyl ketone				C		Α	Yes	1				
The state of the s	MBK		D			A	Yes					
Methyl butyrate	MBU		D	С		A	Yes	1				
Methyl ethyl ketone	MEK		D	С		A	Yes					
Methyl heptyl ketone	МНК		D	D		Α	Yes	and the second second				
Methyl isobutyl ketone	MIK	18 2	D	С		A	Yes					
Methyl naphthalene (molten)	MNA		D	Ε		Α	Yes	1		Lac II		
Mineral spirits	MNS	33	D	D		Α	Yes	1				
Myrcene	MRE	30	D	D		Α	Yes	1				
Naphtha: Heavy	NAG	33	D	#		Α	Yes	1				
Naphtha: Petroleum	PTN	33	D	#		Α	Yes					
Naphtha: Solvent	NSV	33	D	D		Α	Yes					



Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Shipyard: TRINITY ASHLAND

15-May-09

CITY

							-	- mar at	tions of Corrison			
Cargo Identificat	ion					Conditions of Carriage						
Name laphtha: Stoddard solvent	Chem Code NSS	Compat Group No 33	Sub Chapter D	Grade D	Hull Type	Tank Groun A	App'd (Y or N) Yes	VCS	Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Period		
aphtha: Varnish makers and painters (75%)	NVM	33	D	С		Α	Yes	1				
onane (all isomers), see Alkanes (C6-C9)	NAX	31	D	D		Α	Yes	1				
onene (all isomers)	NON	30	D	D		Α	Yes	2				
onyl alcohol (all isomers)	NNS	20 2	D	E		Α	Yes	1				
onyl phenol	NNP	21	D	E		Α	Yes	_ 1				
lonyl phenol poly(4+)ethoxylates	NPE	40	D	E		Α	Yes	1				
Octane (all isomers), see Alkanes (C6-C9)	OAX	31	D	С		Α	Yes	1				
Octanoic acid (all isomers)	OAY	4	D	E		Α	Yes	1				
Octanol (all isomers)	ocx	20 2	D	E		Α	Yes	1				
Octene (all isomers)	OTX	30	D	С		Α	Yes	2				
Dil, fuel: No. 2	OTW	33	D	D/E		Α	Yes	1				
Dil, fuel: No. 2-D	OTD	33	D	D		Α	Yes	1				
Dil, fuel: No. 4	OFR	33	D	D/E		Α	Yes	1				
Dil, fuel: No. 5	OFV	33	D	D/E		Α	Yes	1				
Oil, fuel: No. 6	OSX	33	D	E		Α	Yes	1	And the second s			
Oil, misc: Crude	OIL	33	D	C/D		Α	Yes	1	The state of the s			
Oil, misc: Diesel	ODS	33	D	D/E		Α	Yes	1				
Oil, mise: Gas, high pour	OGP	33	D	E		Α	Yes	1				
Oil, misc: Lubricating	OLB	33	D	E		Α	Yes	1				
Oil, misc: Residual	ORL	33	D	E		Α	Yes	1				
Oil, misc: Turbine	OTB	33	D	E		Α	Yes	1				
Pentane (all Isomers)	PTY	31	D	Α		Α	Yes	5				
Pentene (all isomers)	PTX	30	D	Α		Α	Yes	5				
alpha-Pinene	PIO	30	D	D		Α	Yes	1				
beta-Pinene	PIP	30	D	D		Α	Yes	1				
Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether	PAG	40	D	E		Α	Yes	1				
Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether acetate	PAF	34	D	E		Α	Yes	1				
Polybutene	PLB	30	D	E		Α	Yes	1				
Polypropylene glycol	PGC	40	D	E		Α	Yes	- 1		11111111111111111111		
iso-Propyl acetate	IAC	34	D	С		Α	Yes	1				
n-Propyl acetate	PAT	34	D	С		Α	Yes	1				
iso-Propyl alcohol	IPA	20 2	D	С		Α	Yes	1				
n-Propyl alcohol	PAL	20 2	D	С		Α	Yes	1				
Propylbenzene (all isomers)	PBY	32	D	D		Α	Yes	1				
iso-Propylcyclohexane	IPX	31	D	D		Α	Yes	1				
Propylene glycol	PPG	20 ²	D	E		Α	Yes					
Propylene glycol methyl ether acetate	PGN	N 34	D	D		Α	Yes	1				
Propylene tetramer	PTT	30	D	D		Α	Yes	5 1				
Sulfolane	SFL	. 39	D	Ε		Α	Ye	s 1				
Tetraethylene glycol	TTG	Market Company	D	E		Α	Ye					
Tetrahydronaphthalene	THI	N 32	D	E		A	Ye	s 1				
Toluene	TOI	32	D	С		A	Ye					
Tricresyl phosphate (less than 1% of the ortho isomer)	TCF	34	D	E		Α	Ye	s '				
Triethylbenzene	TE	3 32	D	E		Α	Ye	s ·	1			
Triethylene glycol	TEC		D	E		А	Ye	s	1			
	TPS		D	E		Α	Ye	s	1			
Triethyl phosphate Trimethylbenzene (all isomers)	TR		D	{D}	}	A	Ye	s	1			
	TR		D	E		А	Ye	s	1			
Trixylenyl phosphate Undecene	UD		D	D/8	F	A	Ye	s	1			



Department of Homeland Security **United States Coast Guard**

Dated: 15-May-09

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Shipyard: TRINITY ASHLAND

Hull #: 4619

Official #: 1219325

Page 7 of 8

Cargo Identification								Conditions of Carriage						
							Vapor F	Recovery						
Name 1-Undecyl alcohol	Chem Code UND	Compat Group No 20	Sub Chapter D	Grade E	Hull Type	Tank Groun A	App'd (Y or N) Yes	VCS Category 1	Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Period				
Xylenes (ortho-, meta-, para-)	XLX	32	D	D	area an areas see a	Α	Yes	1						



United States Coast Guard

Serial #: C1-0901515

15-May-09

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: KIRBY 28107

Official #: 1219325

Page 8 of 8

Shipyard: TRINITY ASHL

Hull #: 4619

Explanation of terms & symbols used in the Table:

Cargo Identification

Chem Code

The proper shipping name as listed in 46 CFR Table 30.25-1, 46 CFR Table 151.05, and 46 CFR Part 153 Table 2.

none

Compatability Group No.

Note 1

Note 2

The three letter designation assigned to the cargo in the Chemical Hazards Response Information System (CHRIS) Manual. Certain mixtures of cargoes may not have a CHRIS Code assigned.

The cargo reactive group number assigned for compatibility determinations in 46 CFR Part 150 Tables I and II. In accordance with 46 CFR 150.130, the Person-in-Charge of the barge is responsible for ensuring that the compatibility requirements of 46 CFR Part 150 are met. Cargoes must be checked for compatibility using the figures, tables,

the barge is responsible for ensuming that the Company requirements group number.

and appendices of 46 CFR 150 in conjunction with the assigned reactive group number.

Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility Because of the very high reactivity or unusual conditions of carriage or potential compatibility problems, this product is not assigned to a specific group in the Compatibility and the compatibility and the compatibility and the compatibility and the compatibility problems. (202) 372-1425

See Appendix I to 46 CFR Part 150 - exceptions to the compatability chart.

Subchapter Subchapter D Subchapter O Note 3

The subchapter in Title 46 Code of Federal Regulations under which the cargo has been classified. Those flammable and combustible liquids listed in 46 CFR Table 30.25-1. Those hazardous cargoes listed in 46 CFR Table 151.05 and 46 CFR Part 153 Table 2.

Those cargoes listed in 46 CFR Part 153 Table 2 are non-regulated cargoes when carried in bulk on non-oceangoing barges.

Grade

A. B. C D, E Note 4

NA

Hull Type

NA

The cargo classification assigned to each flammable or combustible liquid. Grades inside of "{ }" indicate a provisional assignment based upon literature sources which were not verified by manufacturers data. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of

that grade of cargo.

at grade of cargo.
Flammable liquid cargoes, as defined in 46 CFR 30-10.22.
Flammable liquid cargoes, as defined in 46 CFR 30-10.15.
Combustibile liquid cargoes, as defined in 46 CFR 30-10.15.
The flammability/combustibility grade of these cargoes may vary depending upon the flashpoint and Reid vapor pressure. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo.
Those subchapter O cargoes which are not classified as a flammable or combustible liquid.
No flammability/combustibility grade has been assigned yet, as the necessary flash point/vapor pressure data for such assignments are presently not available.

The required barge hull classification for carriage of the specified Subchapter O hazardous material cargo, see 46 CFR 151.10-1. Designed to carry products which require the maximum preventive measures to preclude the uncontrolled release of the cargo. See 46 CFR 151.10-1(b)(1). Designed to carry products which require significant preventive measures to preclude the uncontrolled release of cargo. See 46 CFR 151.10-1(b)(3). Designed to carry products of sufficient hazard to require a moderate degree of control. See 46 CFR 151.10-1(b)(4). Not applicable to barges certificated under Subchapter D.

Conditions of Carriage

Vapor Recovery Approved (Y or N) The vessel's tank group (as defined in Section 4) which is authorized for carriage of the named cargo.

Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo. No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

Conditions of Carriage

Tank Group Vapor Recover Approved (Y or N) The vessel's tank group (as defined under the "46 CFR Tank Group Characteristics" listed on page 1) which is authorized for carriage of the named cargo

Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

VCS Category: Category 1

The specified cargo's provisional classification for vapor control systems.

(No additional VCS requirements above those for benzene, gasolines and crude oil) All requirements applying to the handling of oil and hazardous materials in Titles 33, and 46 Code of Federal Regulations (CFR) apply to these cargoes. Those specifically dealing with vapor control systems are in 33 CFR 155.750, 33 CFR 156.120, 33 CFR 156.170, 46 CFR 35.35 and 46 CFR 39. The cargo tank venting system calculations (46 CFR 39.20-11) and the pressure drop calculations (46 CFR 39.30-1(b)) must use appropriate friction factors, vapor densities and vapor growth rates.

Category 2

(Polymerizes) Polymerization and residue build-up of these cargoes can adversely affect the vessel by fouling safety componenets and restricting vapor flow which could (regimenzes) Polymenzation and residue unit-up on these dangoes can adversely affect the vessel's country affect of the very residue to the vessel's owner must develop a method of ensuring all VCS safety components are functional and polymer build-up is not lead to cargo tank overpressurization. The vessel's owner must develop a method of ensuring all VCS safety components are functional and polymer build-up is not causing an unsafe condition due to increased pressure in the vapor control piping and cargo tanks. The method shall be acceptable to the local Officer in Charge, Marine causing an unsafe condition due to increased pressure in the vapor control piping and cargo tanks. The method shall be acceptable to the local Officer in Charge, Marine Inspection. This is in addition to the requirements of Category 1. Please note that a material not normally considered a monomer can be a problem in detonation arrester.

Category 3

(Highly toxic) VCSs for these toxic cargoes cannot use a spill valve or rupture disk as the primary means to meet the overfill protection requirement of 46 CFR 39.20-9. This requirement is in addition to the requirements of Category 1.

Category 4

(Polymerizes and highly toxic) Must comply with requirements of Categories 1, 2 and 3.

Category 5

(High vapor pressure) VCS pressure drop calculations for cargoes with a vapor pressure greater than 14.7 psia at 115 F must take into account increased vapor-air mixture densities and vapor growth rates as compared to Category 1 cargoes. Consult the Marine Safety Center's VCS Guidelines for further information. This requirement is in addition to the requirements of Category 1.

Category 6

(High vapor pressure and highly toxic) Must comply with requirements of Categories 1, 3 and 5. (High vapor pressure and polymerizes) Must comply with requirements of Categories 1, 2 and 5.

Category 7

The cargo has not been evaluated/classified for use in vapor control systems.



16917 Market St, Channelview, TX 77530 (713)453-0413

LVT Sales Order	LV-4075-SO
Barge Name	K 28107
Work Order #	

Shop Order & Test Report

Customer:	Kirby Inland Ma	arine Order#	K 28107	
Make	ERL	Size 4"	Model # Equate	
Serial #	LV4075-1	Inlet 4" 150	Outlet	
Constrution:	P/V	in the latest production of the latest product	Cap: N/A	-
Set Pressure:	6.0 psi pressure/	2.0 psi vacuum		
Tag:		Orifice:	N/A	
Work Required	H: Cor	mplete Overhaul	Test Air	
			y	
Condition Rec	eived:	Need Repair		
General C	Condition Pre-	renair		
Inlet	Dirty	Sprii	ng Good Cond.	/
Seats	Dirty	Wo		
Guide	Dirty	Repa	irs Lapped Seats	
Outlet	Dirty			
		Installed viton qua	d rings	
Parts replace	d and other work:			
		-	1	
		e. 1 T .	Danasa	
		Final Test	Keport	
Date	8/17/2019			
Date Set Pressure		2/2.0 psi vacuum		
Nozzle Ring S		/A		
Back Pressur		/A		
Tested By:	Abolto	A A A A A A A A A A A A A A A A A A A	Witness/Assy By	cty
	1 120			
IIS Coast G	uard Witness		P	

Law Valve of Texas

16917 Market St, Channelview, TX 77530 (713)453-0413

LVT Sales Order	LV-4075-50		
Barge Name	K 28107		
Work Order #	LV-3788-wo		

Shop Order & Test Report

(A.	nd Marine Orde	~
/lake ERL	Size 6"	Model # Superac II
ierial# 358) \<	Inlet 6" 15	Outlet NA
Constrution: P/V		Cap: N/A
-	e/2.0 psi vacuum	*
Set Pressure. (99 par pressure		
Tag:	Orifi	ce: N/A
Work Required:	Complete Overhaul	Test Air
1975 (CT-1975 (CT-1975 CT-1975		
Condition Received:	Need Repair	
70		
General Condition Pr	e-repair .	
Inlet Dirty	9	pring
Seats Dirty		Work ST
Guide Dirty	R	epairs Lapped Seats Replaced gasket
Outlet Dirty		
Parts replaced and other work	See attached p	arts list
Parts replaced and other work		4
	(
		. =
	Final Tes	t Report
Date 8/17//9	/3 0 mai vinauvim	
	ure/2.0 psi vacuum	
Nozzle Ring Setting	N/A N/A	4 0
Back Pressure	N/A	Witness/Assy By:
Tested By: Lee	in _	WILLIESS/ ASSY DY OUT ALOUA
- Garage		
U.S. Coast Guard Witness	8	

Safety valve inspection report

Certificate nr Date

376

08-13-2019

Job no. LV- 4075-SO

Client Kirby Inland Marine

Valve data

Set pressure (cold)

125 psi

Tag. No.

Serial No.

10161726 Farris

26RA10L-120

Manufacturer

Type / Model

Size

6xRx8

Rating

150x150

Nozzle / Orifice

R

Fluid

Barge #

K 28107

Test data

Set pressure test

Found set pressure

Reseat pressure (indication)

Result

Test method

125 psi

123 psi

Passed

Air

Seat tightness test

Leakage

0 bubbles/min.

Test pressure

Result

118 psi Passed

Manual Back Pressure test


BP Pressure

30 psi

BP Result

Passed

Law Valve of Texa

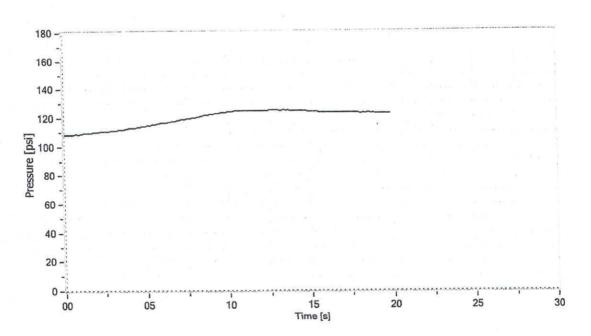

Tested by

Name

Javier Gutierrez

Date

Signature

re As

Inspected by Name CHARLES MURPHEY

Name

Date

Signature